


PERI UP FLEX STAIRTOWERS

Staircase 75 – 3.0m Alternating

Compliance Sheets

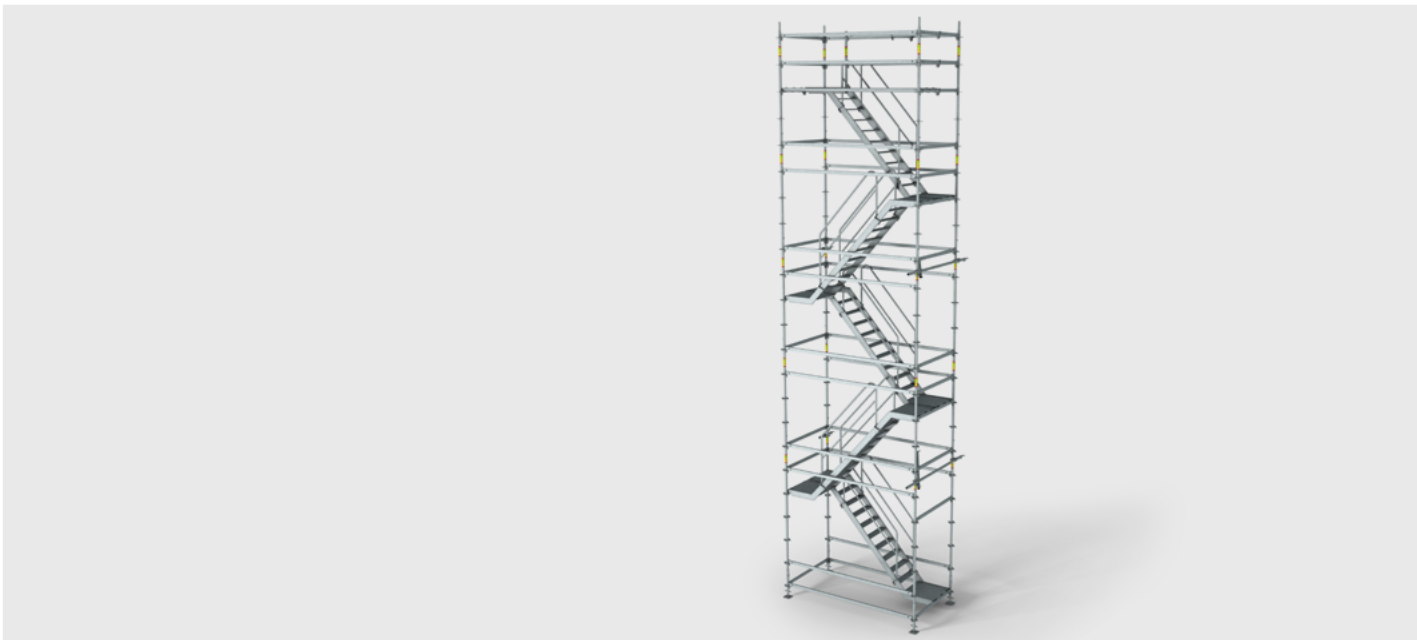

Index

PERI UP 3.0m Alt Stair Tower 03300mm	1
PERI UP 3.0m Alt Stair Tower 03300mm Kit List	2
PERI UP 3.0m Alt Stair Tower 04300mm	3
PERI UP 3.0m Alt Stair Tower 04300mm Kit List	4
PERI UP 3.0m Alt Stair Tower 05300mm	5
PERI UP 3.0m Alt Stair Tower 05300mm Kit List	6
PERI UP 3.0m Alt Stair Tower 06300mm	7
PERI UP 3.0m Alt Stair Tower 06300mm Kit List	8
PERI UP 3.0m Alt Stair Tower 06300mm - 3m Lifts	9
PERI UP 3.0m Alt Stair Tower 06300mm - 3m Lifts Kit List	10
PERI UP 3.0m Alt Stair Tower 07300mm	11
PERI UP 3.0m Alt Stair Tower 07300mm Kit List	12
PERI UP 3.0m Alt Stair Tower 08300mm	13
PERI UP 3.0m Alt Stair Tower 08300mm Kit List	14
PERI UP 3.0m Alt Stair Tower 09300mm	15
PERI UP 3.0m Alt Stair Tower 09300mm Kit List	16
PERI UP 3.0m Alt Stair Tower 09300mm – 3m Lifts	17
PERI UP 3.0m Alt Stair Tower 09300mm – 3m Lifts Kit List	18
PERI UP 3.0m Alt Stair Tower 10300mm	19
PERI UP 3.0m Alt Stair Tower 10300mm Kit List	20
PERI UP 3.0m Alt Stair Tower 11300mm	21
PERI UP 3.0m Alt Stair Tower 11300mm Kit List	22
PERI UP 3.0m Alt Stair Tower 12300mm	23
PERI UP 3.0m Alt Stair Tower 12300mm Kit List	24
PERI UP 3.0m Alt Stair Tower 12300mm – 3m Lifts	25
PERI UP 3.0m Alt Stair Tower 12300mm – 3m Lifts Kit List	26
PERI UP 3.0m Alt Stair Tower 13300mm	27
PERI UP 3.0m Alt Stair Tower 13300mm Kit List	28
PERI UP 3.0m Alt Stair Tower 14300mm	29
PERI UP 3.0m Alt Stair Tower 14300mm Kit List	30
PERI UP 3.0m Alt Stair Tower 15300mm	31
PERI UP 3.0m Alt Stair Tower 15300mm Kit List	32
PERI UP 3.0m Alt Stair Tower 15300mm – 3m Lifts	33
PERI UP 3.0m Alt Stair Tower 15300mm – 3m Lifts Kit List	34
PERI UP 3.0m Alt Stair Tower 16300mm	35
PERI UP 3.0m Alt Stair Tower 16300mm Kit List	36
PERI UP 3.0m Alt Stair Tower 17300mm	37
PERI UP 3.0m Alt Stair Tower 17300mm Kit List	38
PERI UP 3.0m Alt Stair Tower 18300mm	39
PERI UP 3.0m Alt Stair Tower 18300mm Kit List	40
PERI UP 3.0m Alt Stair Tower 18300mm – 3m Lifts	41
PERI UP 3.0m Alt Stair Tower 18300mm – 3m Lifts Kit List	42
PERI UP 3.0m Alt Stair Tower 19300mm	43
PERI UP 3.0m Alt Stair Tower 19300mm Kit List	44
PERI UP 3.0m Alt Stair Tower 20300mm	45
PERI UP 3.0m Alt Stair Tower 20300mm Kit List	46
Run-off Configurations. Details	47
Run-off Configurations. Kit List	48



Maximum / Practical No Persons permitted on Stair Tower = 8



Calculated Leg Load= 4.5 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 1.0 kN
Max. Calc. Force A[⊥]: 1.8 kN
Max. Calc. Tube Axial Force: 2.0 kN

Netted Scaffold (<0.6cf_⊥)*

Max. Calc. Force All : 2.5 kN
Max. Calc. Force A[⊥]: 4.5 kN
Max. Calc. Tube Axial Force: 5.1 kN

Sheeted Scaffold

Max. Calc. Force All : 2.6 kN
Max. Calc. Force A[⊥]: 4.7 kN
Max. Calc. Tube Axial Force: 5.3 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 590 kg




Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 3.3 m
Lift Heights: 3.0 m



Scaffold placed Max 0.3m from the structure

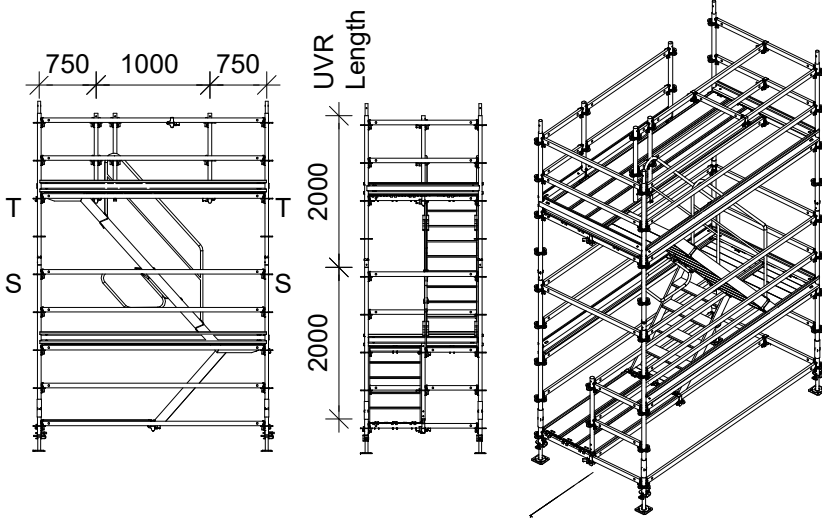

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600


Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 3.3m high		June 2022	1

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	8	PC	0.06	0.47
100009	Standard UVR 200	8	PC	10.00	80.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114641	Ledger UH 150 Plus	15	PC	4.72	70.80
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	17	PC	8.68	147.56
124112	Steel Deck UDG 25 x 150	3	PC	9.41	28.23
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111124	Staircase UAS 75 x 300/200, Alu	1	PC	32.90	32.90
100742	Stair Guardrail UAG	2	PC	10.00	20.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	11	PC	1.09	11.99
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	4	PC	2.99	11.96
110211	Toeboard Steel UPY 300	3	PC	6.09	18.27
Total weight			kg		587.97

Bins and Pallets are not included in the material list.

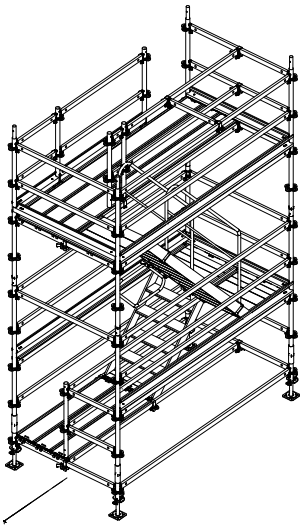

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 3.3m high. Kit List		June 2022	2



Maximum / Practical No Persons permitted on Stair Tower = 10



Calculated Leg Load= 5.5 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 1.3 kN
Max. Calc. Force A[⊥]: 2.4 kN
Max. Calc. Tube Axial Force: 2.7 kN

Netted Scaffold (<0.6cf_⊥)*

Max. Calc. Force All : 3.3 kN
Max. Calc. Force A[⊥]: 6.0 kN
Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 2.6 kN
Max. Calc. Force A[⊥]: 4.7 kN
Max. Calc. Tube Axial Force: 5.3 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 630 kg




Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 4.3 m
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

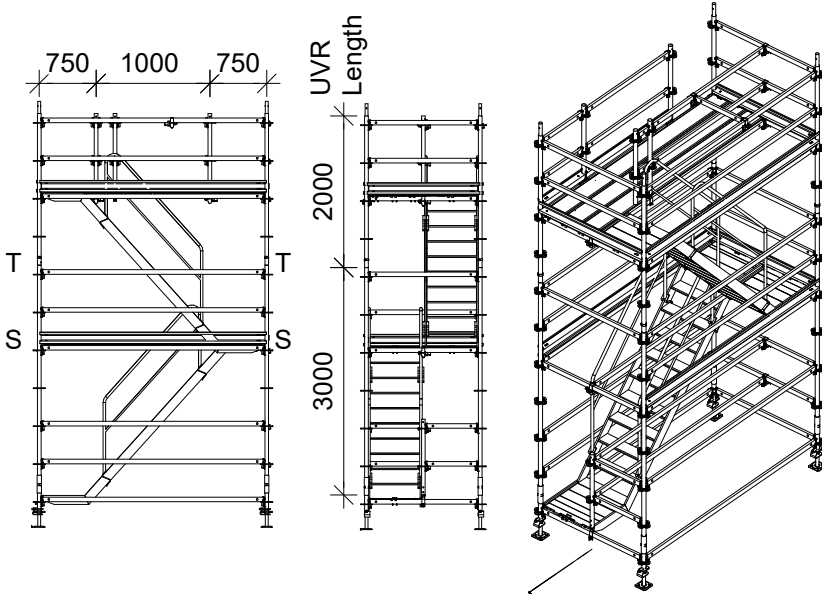

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600


Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 4.3m high		June 2022	3

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	8	PC	0.06	0.47
100009	Standard UVR 200	4	PC	10.00	40.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114641	Ledger UH 150 Plus	17	PC	4.72	80.24
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	19	PC	8.68	164.92
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111124	Staircase UAS 75 x 300/200, Alu	2	PC	32.90	65.80
100742	Stair Guardrail UAG	4	PC	10.00	40.00
110793	Ledger to Ledger Coupler UHA Half	10	PC	1.09	10.90
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	4	PC	2.99	11.96
110211	Toeboard Steel UPY 300	3	PC	6.09	18.27
Total weight			kg		631.36

Bins and Pallets are not included in the material list.

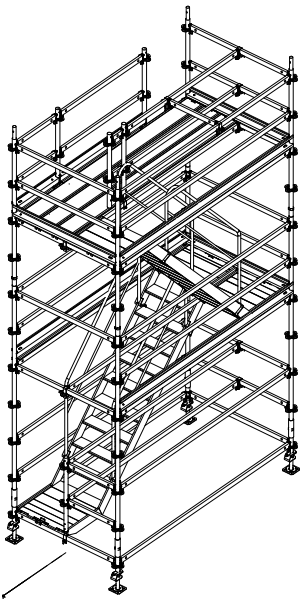

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 4.3m high. Kit List		June 2022	4



Maximum / Practical No Persons permitted on Stair Tower = 11



Calculated Leg Load= 6.0 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 1.6 kN
Max. Calc. Force A[⊥]: 2.9 kN
Max. Calc. Tube Axial Force: 3.3 kN

Netted Scaffold (<0.6cf_⊥)*

Max. Calc. Force All : 1.7 kN
Max. Calc. Force A[⊥]: 3.0 kN
Max. Calc. Tube Axial Force: 3.4 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A[⊥]: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 790 kg




Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 5.3 m
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

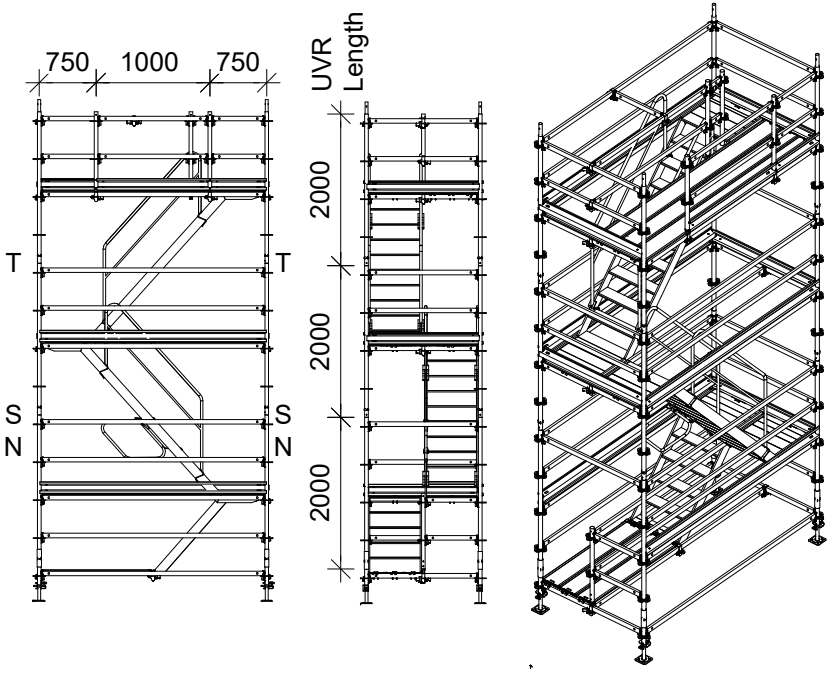

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600


Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 5.3m high		June 2022	5

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	12	PC	0.06	0.71
100009	Standard UVR 200	12	PC	10.00	120.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114641	Ledger UH 150 Plus	20	PC	4.72	94.40
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	24	PC	8.68	208.32
124112	Steel Deck UDG 25 x 150	3	PC	9.41	28.23
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111124	Staircase UAS 75 x 300/200, Alu	2	PC	32.90	65.80
100742	Stair Guardrail UAG	4	PC	10.00	40.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	13	PC	1.09	14.17
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	6	PC	2.99	17.94
110211	Toeboard Steel UPY 300	5	PC	6.09	30.45
Total weight			kg		785.81

Bins and Pallets are not included in the material list.

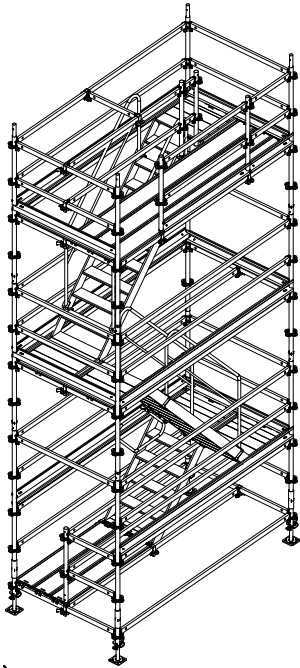

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 5.3m high. Kit List		June 2022	6



Maximum / Practical No Persons permitted on Stair Tower = 13



Calculated Leg Load= 7.0 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 2.0 kN
Max. Calc. Force A^L: 3.5 kN
Max. Calc. Tube Axial Force: 4.0 kN

Netted Scaffold (<0.6cf_L)*

Max. Calc. Force All : 3.3 kN
Max. Calc. Force A^L: 6.0 kN
Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A^L: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 830 kg




Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 6.3 m
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

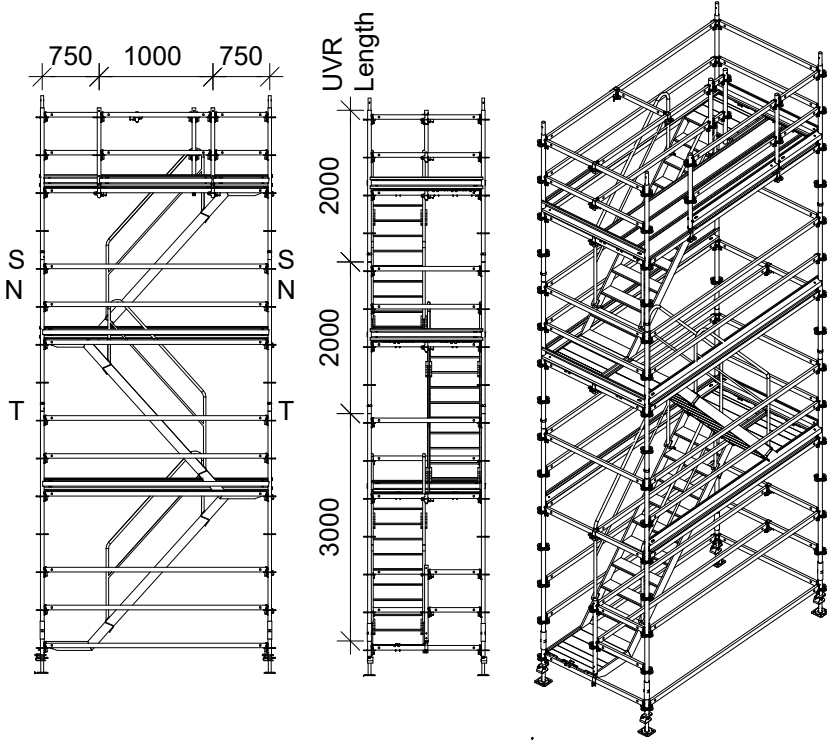

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600


Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5 m Alt 6.3m high		June 2022	7

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	12	PC	0.06	0.71
100009	Standard UVR 200	8	PC	10.00	80.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114641	Ledger UH 150 Plus	22	PC	4.72	103.84
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	26	PC	8.68	225.68
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111124	Staircase UAS 75 x 300/200, Alu	3	PC	32.90	98.70
100742	Stair Guardrail UAG	6	PC	10.00	60.00
110793	Ledger to Ledger Coupler UHA Half	12	PC	1.09	13.08
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	5	PC	2.99	14.95
110211	Toeboard Steel UPY 300	5	PC	6.09	30.45
Total weight			kg		826.21

Bins and Pallets are not included in the material list.

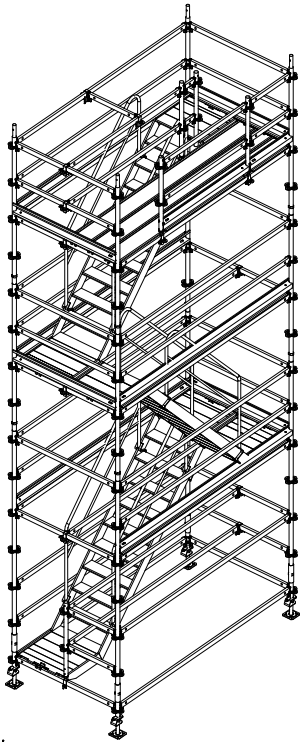

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5 m Alt 6.3m high. Kit List		June 2022	8



Maximum / Practical No Persons permitted on Stair Tower = 13



Calculated Leg Load= 7.5 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 2.0 kN
Max. Calc. Force A^L: 3.5 kN
Max. Calc. Tube Axial Force: 4.0 kN

Netted Scaffold (<0.6cf_L)*

Max. Calc. Force All : 2.5 kN
Max. Calc. Force A^L: 4.5 kN
Max. Calc. Tube Axial Force: 5.1 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A^L: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 960 kg




Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 6.3 m
Lift Heights: 3.0 m



Scaffold placed Max 0.3m from the structure

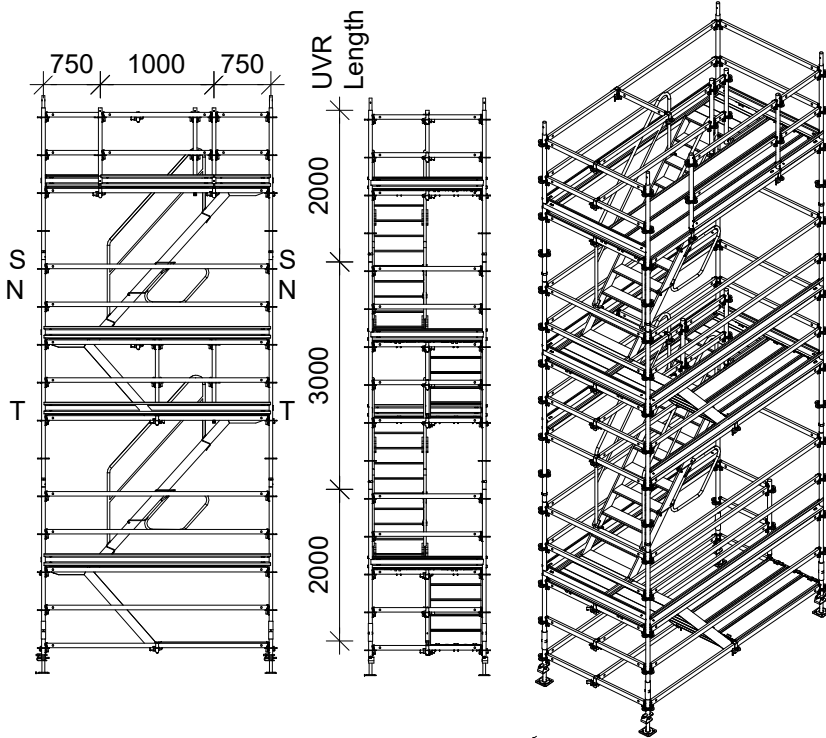

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600


Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 6.3m high (3m Lifts)		June 2022	9

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	12	PC	0.06	0.71
100009	Standard UVR 200	8	PC	10.00	80.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	7	PC	4.61	32.27
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	10	PC	2.73	27.30
114641	Ledger UH 150 Plus	26	PC	4.72	122.72
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	28	PC	8.68	243.04
124112	Steel Deck UDG 25 x 150	6	PC	9.41	56.46
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111103	Staircase UAS 75 x 150/100, Alu	2	PC	17.90	35.80
111124	Staircase UAS 75 x 300/200, Alu	2	PC	32.90	65.80
100742	Stair Guardrail UAG	4	PC	10.00	40.00
133543	Stair Guardrail UAH-2	2	PC	4.51	9.02
110793	Ledger to Ledger Coupler UHA Half	18	PC	1.09	19.62
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	4	PC	1.90	7.60
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	6	PC	2.99	17.94
110211	Toeboard Steel UPY 300	7	PC	6.09	42.63
Total weight			kg		959.21

Bins and Pallets are not included in the material list.

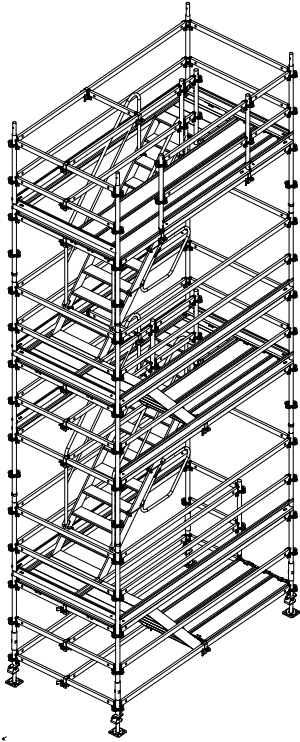

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3 x 1.5 m <i>Alt</i> 6.3m high (3m Lifts). Kit List		June 2022	10



Maximum / Practical No Persons permitted on Stair Tower = 14



Calculated Leg Load= 8.0 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 2.0 kN
Max. Calc. Force A[⊥]: 3.5 kN
Max. Calc. Tube Axial Force: 4.0 kN

Netted Scaffold (<0.6cf⊥)*

Max. Calc. Force All : 3.3 kN
Max. Calc. Force A[⊥]: 6.0 kN
Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A[⊥]: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 980 kg




Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 7.3 m
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

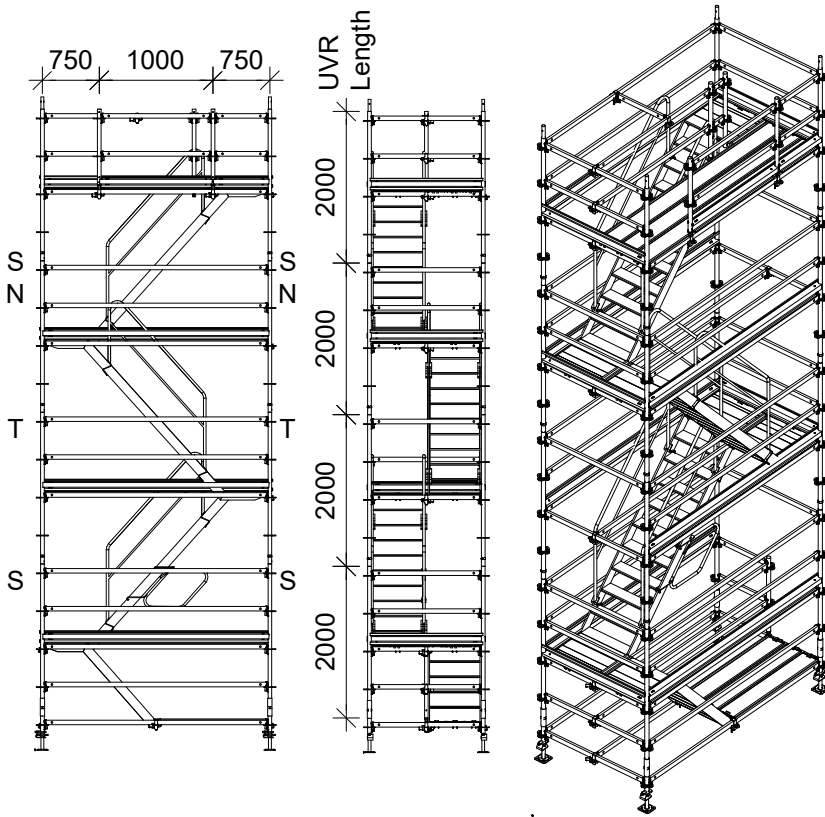

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600


Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5 m Alt 7.3m high		June 2022	11

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	16	PC	0.06	0.94
100009	Standard UVR 200	16	PC	10.00	160.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114641	Ledger UH 150 Plus	25	PC	4.72	118.00
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	31	PC	8.68	269.08
124112	Steel Deck UDG 25 x 150	3	PC	9.41	28.23
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111124	Staircase UAS 75 x 300/200, Alu	3	PC	32.90	98.70
100742	Stair Guardrail UAG	6	PC	10.00	60.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	15	PC	1.09	16.35
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	6	PC	2.99	17.94
110211	Toeboard Steel UPY 300	7	PC	6.09	42.63
Total weight			kg		977.67

Bins and Pallets are not included in the material list.

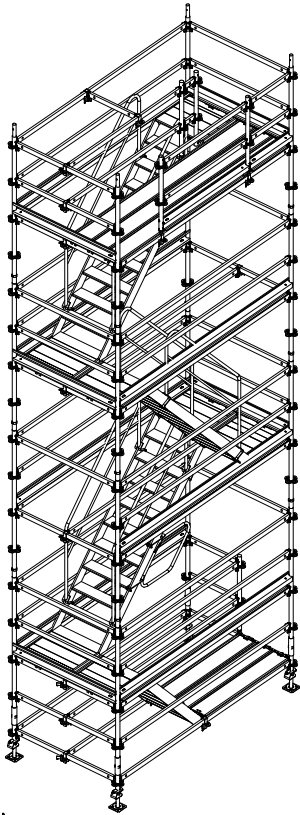

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5 m Alt 7.3m high. Kit List		June 2022	12



Maximum / Practical No Persons permitted on Stair Tower = 16



Calculated Leg Load= 8.5 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 1.3 kN
Max. Calc. Force A^L: 2.4 kN
Max. Calc. Tube Axial Force: 2.7 kN

Netted Scaffold (<0.6cf_L)*

Max. Calc. Force All : 3.3 kN
Max. Calc. Force A^L: 6.0 kN
Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A^L: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1030 kg




Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 8.3 m
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

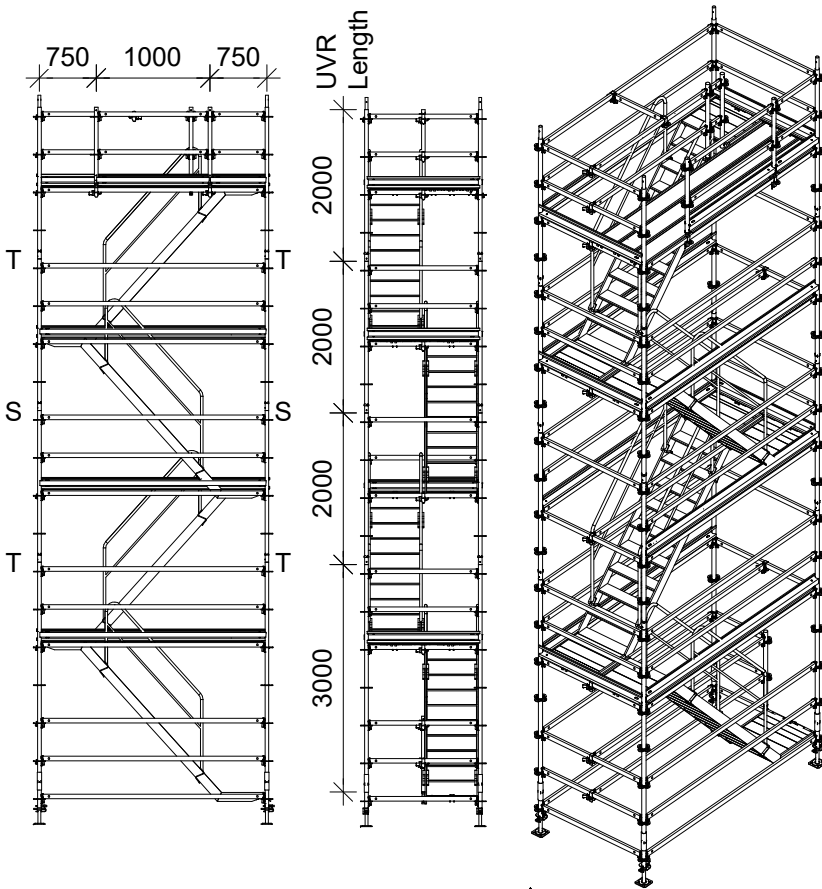

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600


Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5 m Alt 8.3m high		June 2022	13

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	16	PC	0.06	0.94
100009	Standard UVR 200	12	PC	10.00	120.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114641	Ledger UH 150 Plus	27	PC	4.72	127.44
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	33	PC	8.68	286.44
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111124	Staircase UAS 75 x 300/200, Alu	4	PC	32.90	131.60
100742	Stair Guardrail UAG	8	PC	10.00	80.00
110793	Ledger to Ledger Coupler UHA Half	14	PC	1.09	15.26
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	6	PC	2.99	17.94
110211	Toeboard Steel UPY 300	7	PC	6.09	42.63
Total weight			kg		1,021.06

Bins and Pallets are not included in the material list.

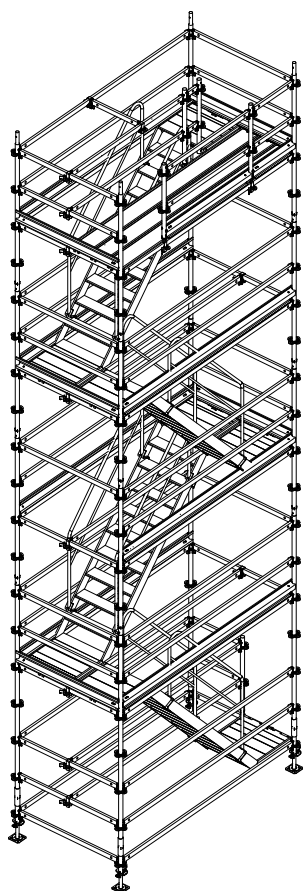

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5 m Alt 8.3m high. Kit List		June 2022	14



Maximum / Practical No Persons permitted on Stair Tower = 17



Calculated Leg Load= 9.5 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 1.3 kN
Max. Calc. Force A^L: 2.4 kN
Max. Calc. Tube Axial Force: 2.7 kN

Netted Scaffold (<0.6cf1)*

Max. Calc. Force All : 3.3 kN
Max. Calc. Force A^L: 6.0 kN
Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A^L: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1170 kg




Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 9.3 m
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

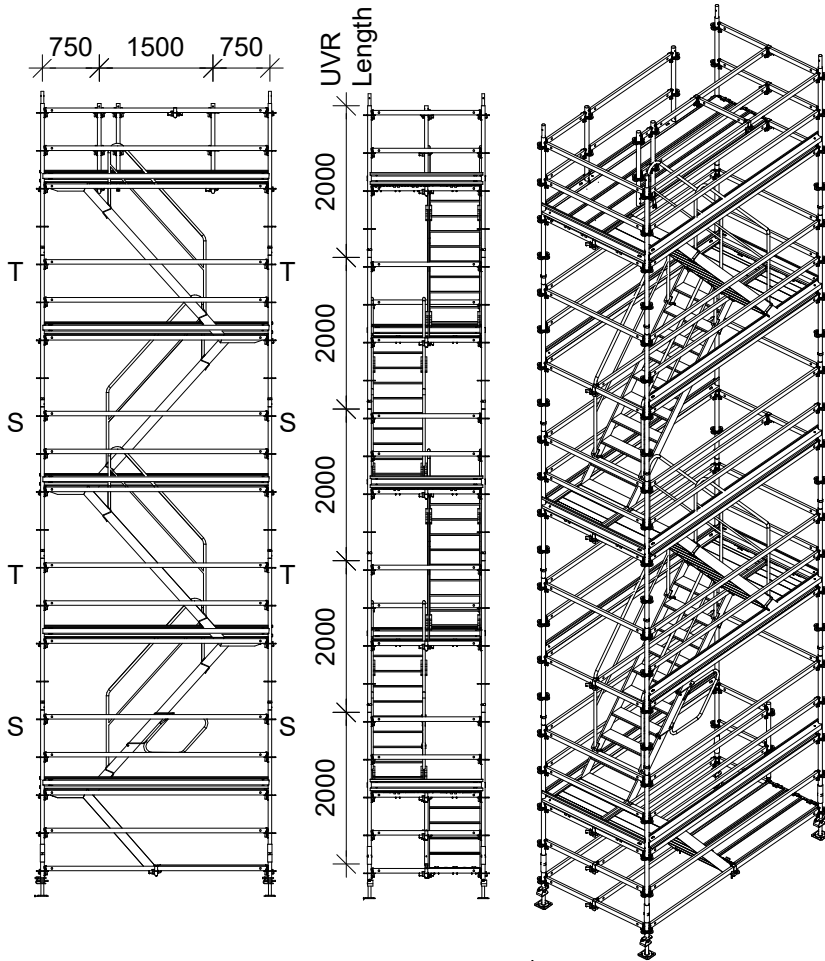

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 9.3m high		June 2022	15

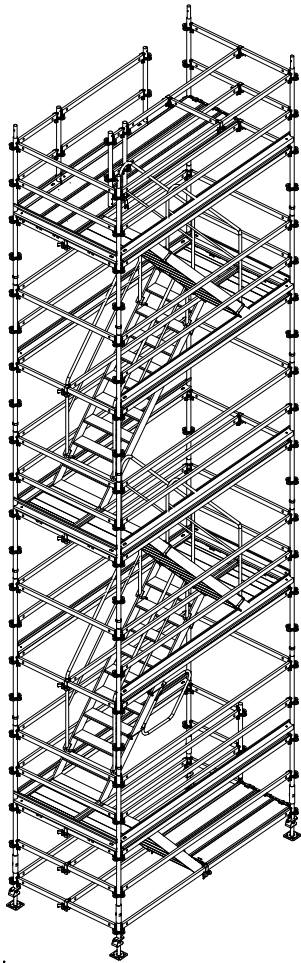

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	20	PC	0.06	1.18
100009	Standard UVR 200	20	PC	10.00	200.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114641	Ledger UH 150 Plus	30	PC	4.72	141.60
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	38	PC	8.68	329.84
124112	Steel Deck UDG 25 x 150	3	PC	9.41	28.23
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111124	Staircase UAS 75 x 300/200, Alu	4	PC	32.90	131.60
100742	Stair Guardrail UAG	8	PC	10.00	80.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	17	PC	1.09	18.53
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	6	PC	2.99	17.94
110211	Toeboard Steel UPY 300	9	PC	6.09	54.81
Total weight			kg		1,169.53

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 9.3m high. Kit List		June 2022	16



Maximum / Practical No Persons permitted on Stair Tower = 17



Calculated Leg Load= 10.0 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 1.7 kN
Max. Calc. Force A^L: 3.5 kN
Max. Calc. Tube Axial Force: 4.0 kN

Netted Scaffold (<0.6cf_L)*

Max. Calc. Force All : 2.5 kN
Max. Calc. Force A^L: 4.5 kN
Max. Calc. Tube Axial Force: 5.1 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A^L: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1340 kg




Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 9.3 m
Lift Heights: 3.0 m



Scaffold placed Max 0.3m from the structure

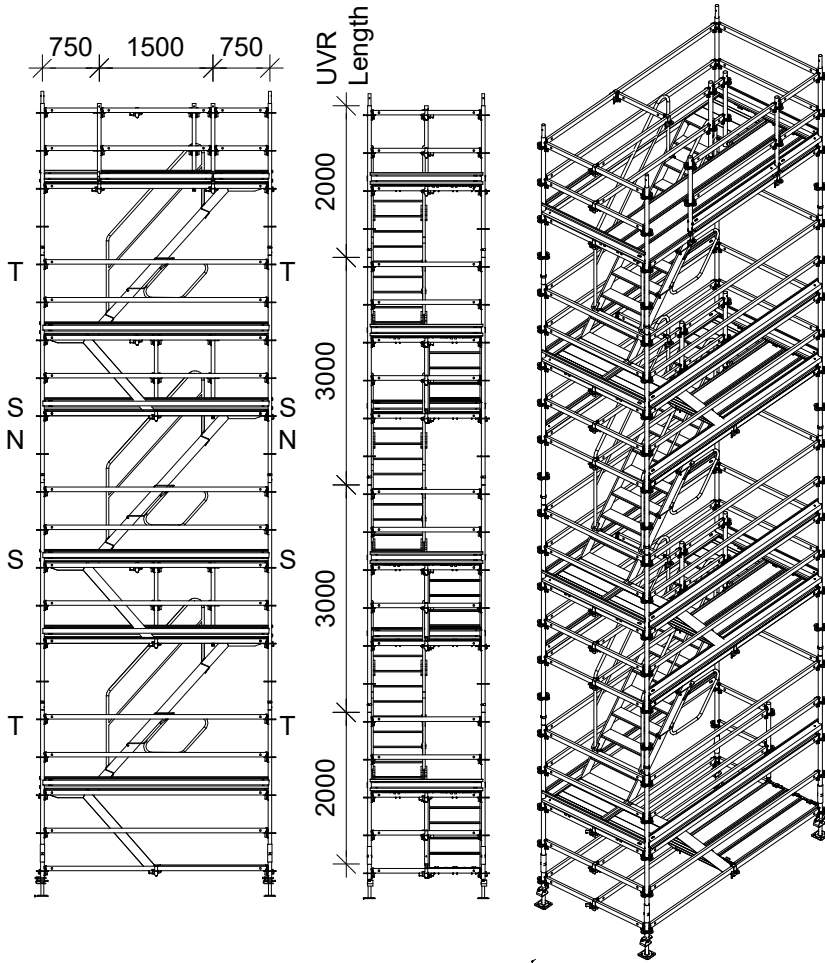

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5 m Alt 9.3m high. (3m Lifts)		June 2022	17

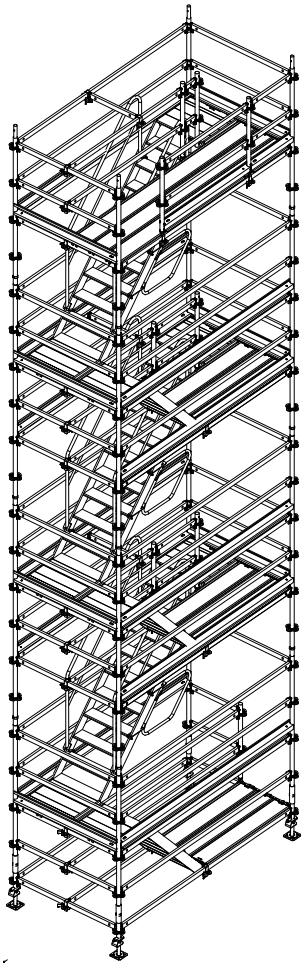

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	16	PC	0.06	0.94
100009	Standard UVR 200	8	PC	10.00	80.00
100012	Standard UVR 300	8	PC	14.70	117.60
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	9	PC	4.61	41.49
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	14	PC	2.73	38.22
114641	Ledger UH 150 Plus	37	PC	4.72	174.64
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	40	PC	8.68	347.20
124112	Steel Deck UDG 25 x 150	9	PC	9.41	84.69
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111103	Staircase UAS 75 x 150/100, Alu	3	PC	17.90	53.70
111124	Staircase UAS 75 x 300/200, Alu	3	PC	32.90	98.70
100742	Stair Guardrail UAG	6	PC	10.00	60.00
133543	Stair Guardrail UAH-2	3	PC	4.51	13.53
110793	Ledger to Ledger Coupler UHA Half	25	PC	1.09	27.25
109764	UH Spigot	3	PC	1.25	3.75
110792	Ledger to Ledger Coupler UHA Half w. Spigot	5	PC	1.90	9.50
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	8	PC	2.99	23.92
110211	Toeboard Steel UPY 300	11	PC	6.09	66.99
Total weight			kg		1,339.13

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3 x 1.5 m <i>Alt</i> 9.3m high. (3m Lifts) Kit List		June 2022	18



Maximum / Practical No Persons permitted on Stair Tower = 19



Calculated Leg Load= 10.0 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 2.0 kN
Max. Calc. Force A[⊥]: 3.5 kN
Max. Calc. Tube Axial Force: 4.0 kN

Netted Scaffold (<0.6cf_⊥)*

Max. Calc. Force All : 3.3 kN
Max. Calc. Force A[⊥]: 6.0 kN
Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A[⊥]: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1220 kg




Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 10.3 m
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

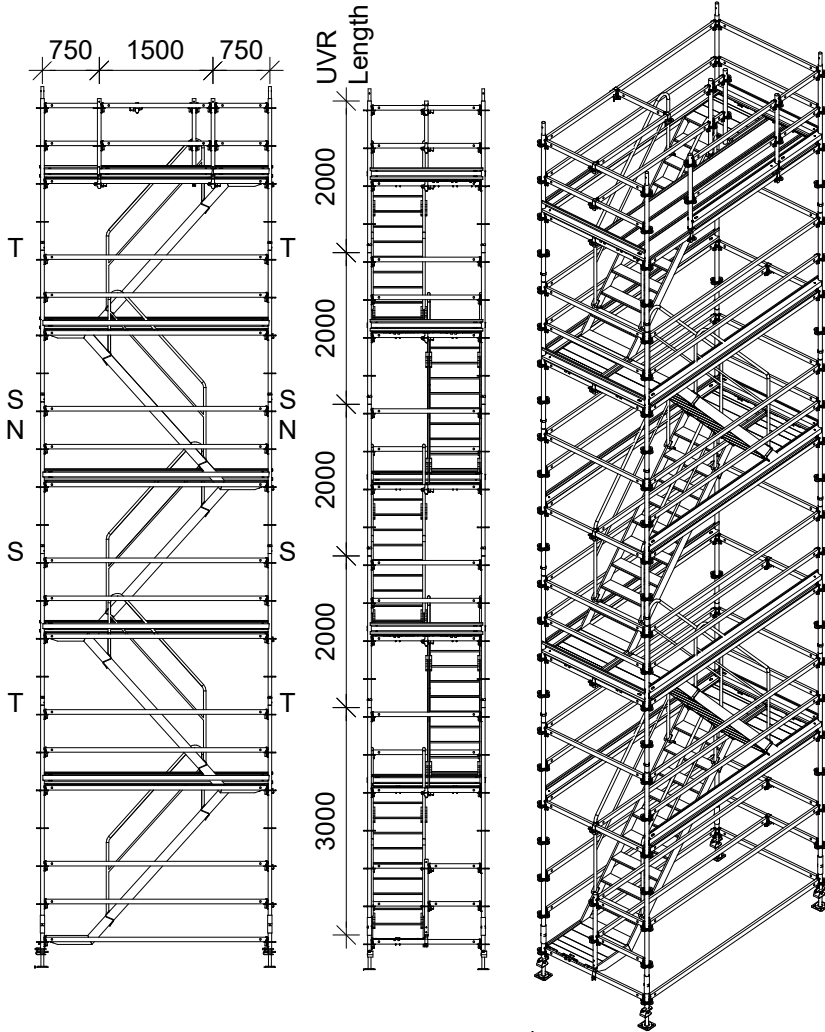

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 10.3m high		June 2022	19

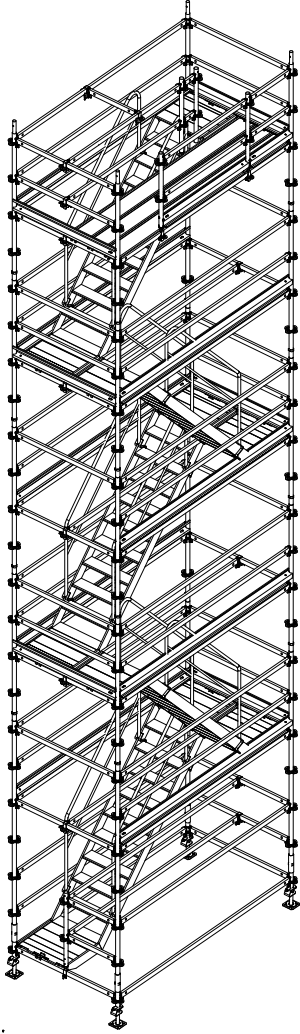

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	20	PC	0.06	1.18
100009	Standard UVR 200	16	PC	10.00	160.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114641	Ledger UH 150 Plus	32	PC	4.72	151.04
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	40	PC	8.68	347.20
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111124	Staircase UAS 75 x 300/200, Alu	5	PC	32.90	164.50
100742	Stair Guardrail UAG	10	PC	10.00	100.00
110793	Ledger to Ledger Coupler UHA Half	16	PC	1.09	17.44
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	7	PC	2.99	20.93
110211	Toeboard Steel UPY 300	9	PC	6.09	54.81
Total weight			kg		1,215.91

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 10.3m high. Kit List		June 2022	20



Maximum / Practical No Persons permitted on Stair Tower = 20




Calculated Leg Load= 11.0 kN



Dynamic Wind Pressure: 0.50 kN/m²



6T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

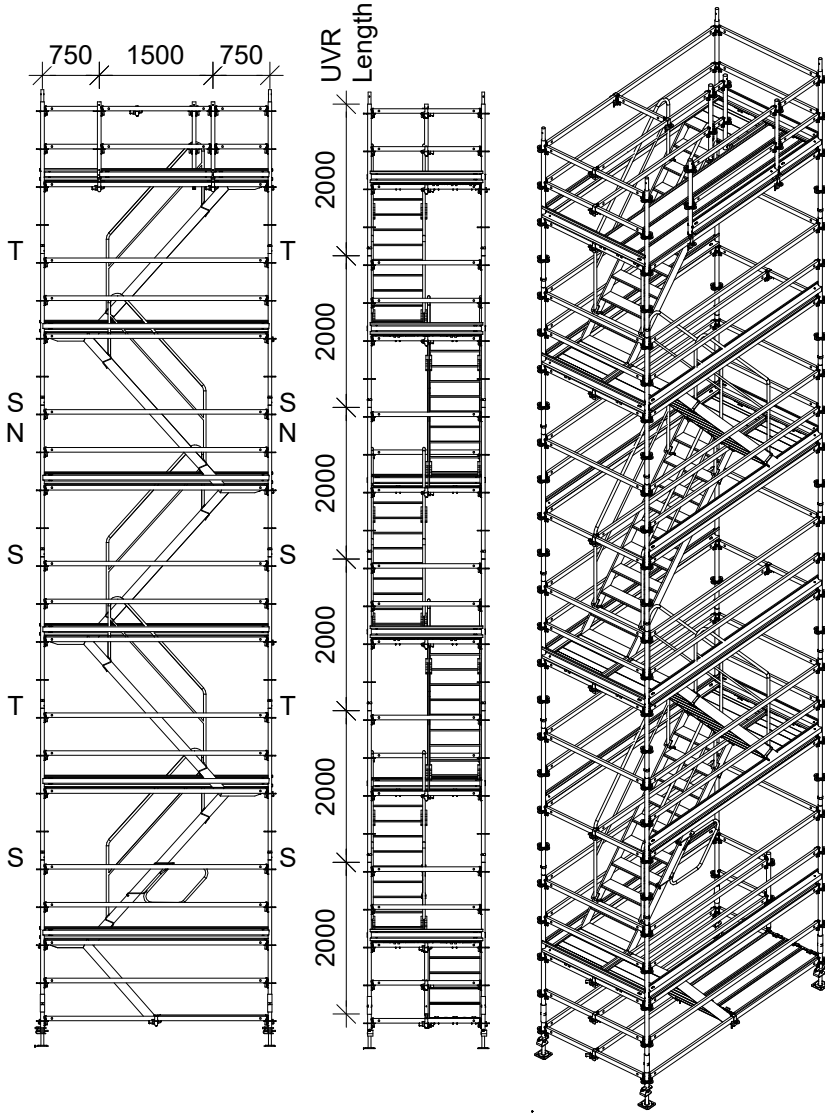

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 2.0 kN
Max. Calc. Force A^L: 3.5 kN
Max. Calc. Tube Axial Force: 4.0 kN

Netted Scaffold (<0.6cf_L)*

Max. Calc. Force All : 3.3 kN
Max. Calc. Force A^L: 6.0 kN
Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A^L: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1370 kg



Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 11.3 m
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company			
Project			
Subject	PERI UP Flex Staircase 75	System Selected by	Date
	3.0m x 1.5m A/t 11.3m high		June 2022
			Sheet 21

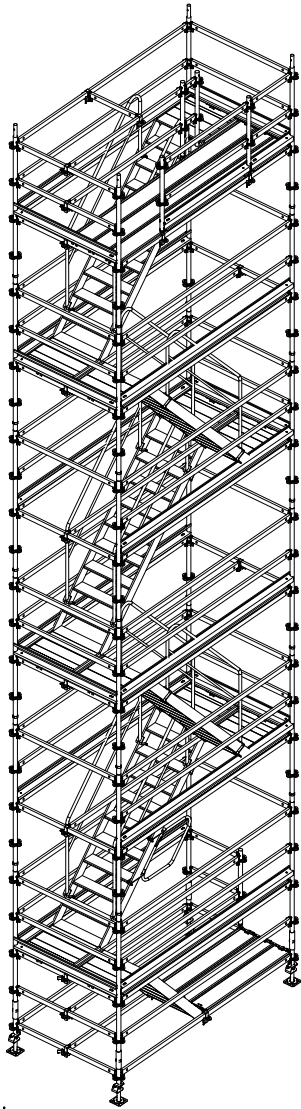

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	24	PC	0.06	1.42
100009	Standard UVR 200	24	PC	10.00	240.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114641	Ledger UH 150 Plus	35	PC	4.72	165.20
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	45	PC	8.68	390.60
124112	Steel Deck UDG 25 x 150	3	PC	9.41	28.23
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111124	Staircase UAS 75 x 300/200, Alu	5	PC	32.90	164.50
100742	Stair Guardrail UAG	10	PC	10.00	100.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	19	PC	1.09	20.71
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	8	PC	2.99	23.92
110211	Toeboard Steel UPY 300	11	PC	6.09	66.99
Total weight			kg		1,367.37

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 11.3m high. Kit List		June 2022	22



Maximum / Practical No Persons permitted on Stair Tower = 22




Calculated Leg Load= 12.0 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

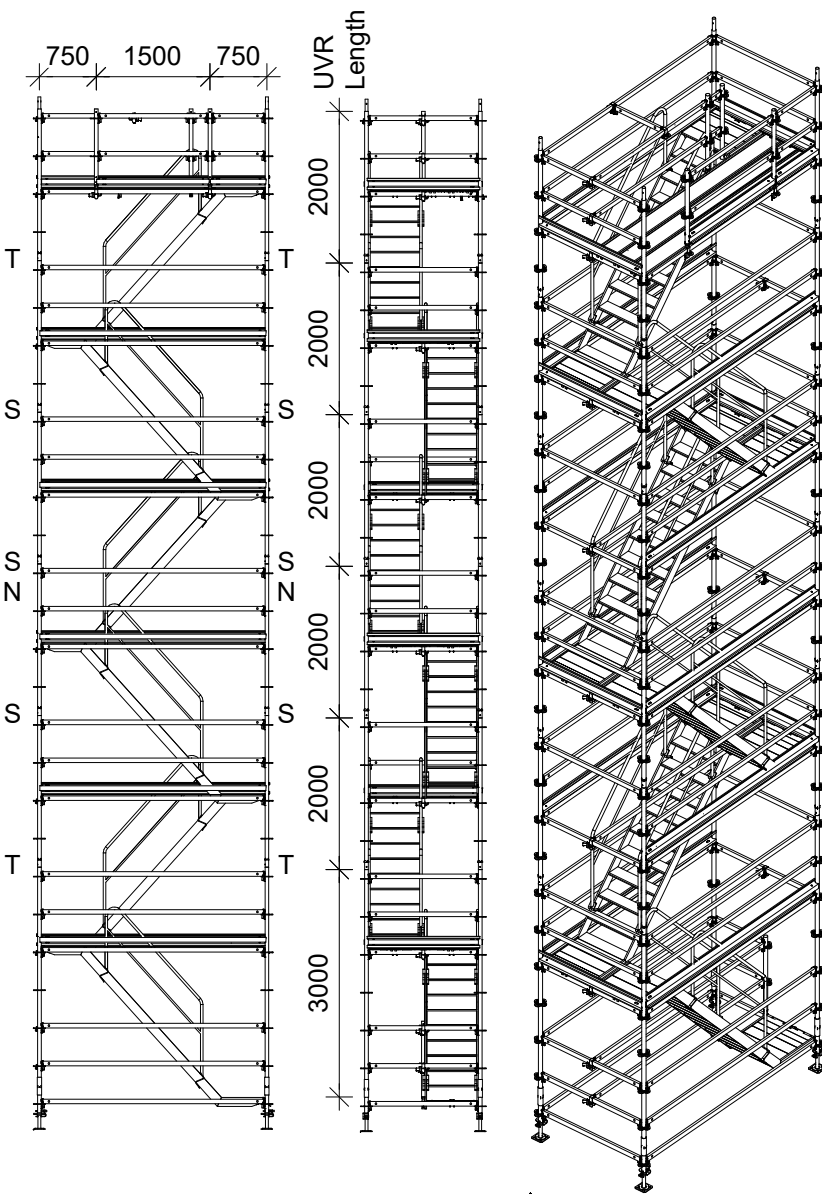

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 2.3 kN
Max. Calc. Force A^L: 4.1 kN
Max. Calc. Tube Axial Force: 4.7 kN

Netted Scaffold (<0.6cf_L)*

Max. Calc. Force All : 3.3 kN
Max. Calc. Force A^L: 6.0 kN
Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A^L: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1420 kg



Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 12.3 m
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 12.3m high		June 2022	23

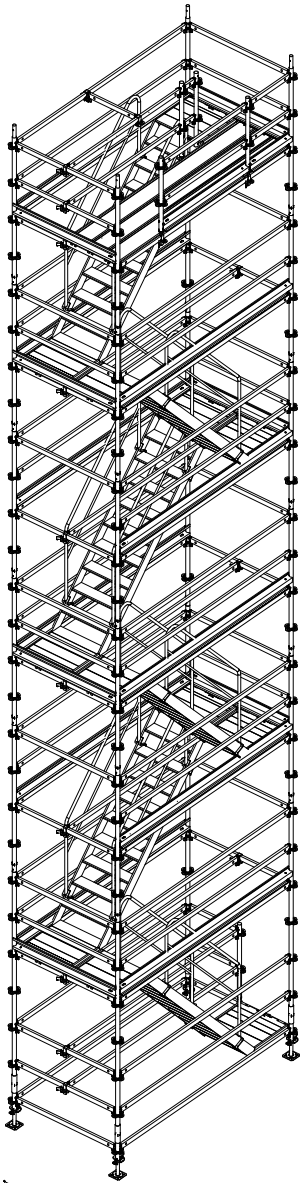

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	24	PC	0.06	1.42
100009	Standard UVR 200	20	PC	10.00	200.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114641	Ledger UH 150 Plus	37	PC	4.72	174.64
114645	Ledger UH 200 Plus	3	PC	6.04	18.12
114651	Ledger UH 300 Plus	47	PC	8.68	407.96
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111124	Staircase UAS 75 x 300/200, Alu	6	PC	32.90	197.40
100742	Stair Guardrail UAG	12	PC	10.00	120.00
110793	Ledger to Ledger Coupler UHA Half	18	PC	1.09	19.62
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	8	PC	2.99	23.92
110211	Toeboard Steel UPY 300	11	PC	6.09	66.99
Total weight			kg		1,416.80

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.

Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 12.3m high. Kit List		June 2022	24



Maximum / Practical No Persons permitted on Stair Tower = 22




Calculated Leg Load= 12.5 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

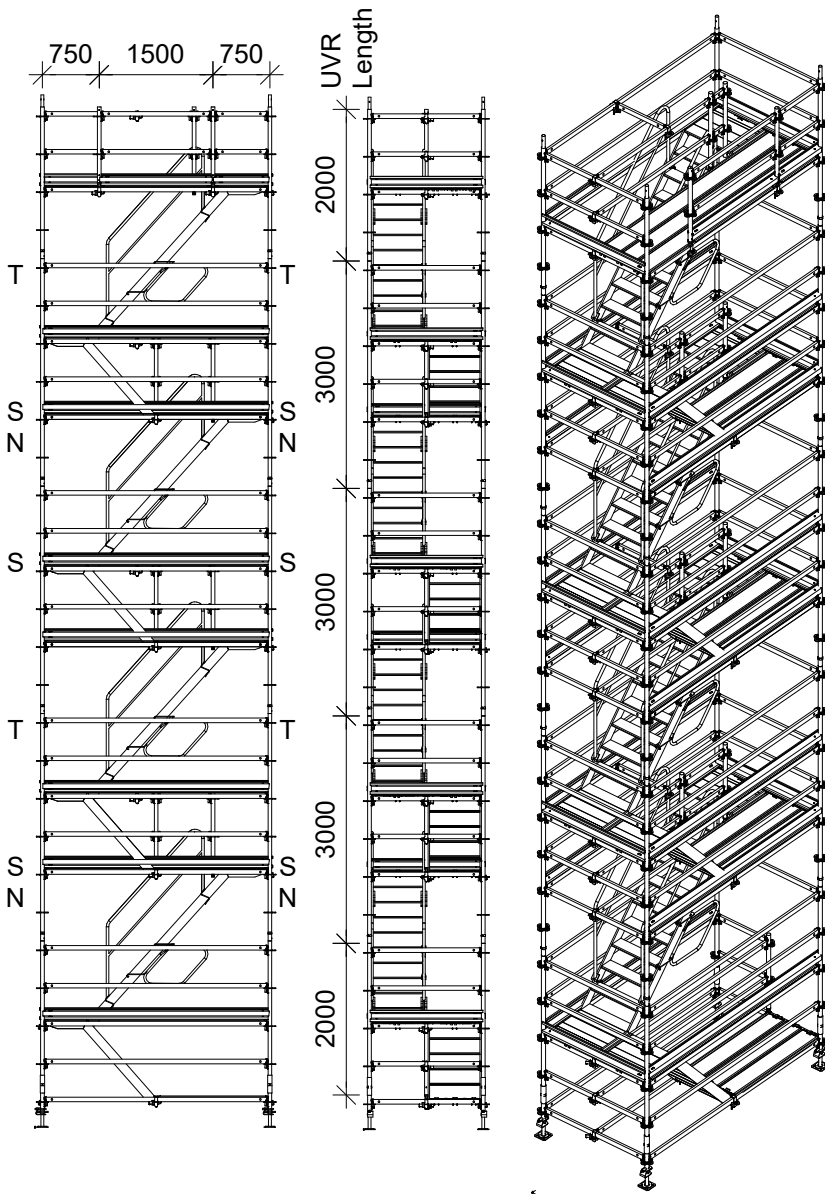

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 1.7 kN
Max. Calc. Force A^L: 3.5 kN
Max. Calc. Tube Axial Force: 4.0 kN

Netted Scaffold (<0.6cf.l)*

Max. Calc. Force All : 2.5 kN
Max. Calc. Force A^L: 4.5 kN
Max. Calc. Tube Axial Force: 5.1 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A^L: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1720 kg



Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 12.3 m
Lift Heights: 3.0 m



Scaffold placed Max 0.3m from the structure

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 12.3m high. (3m Lifts)		June 2022	25

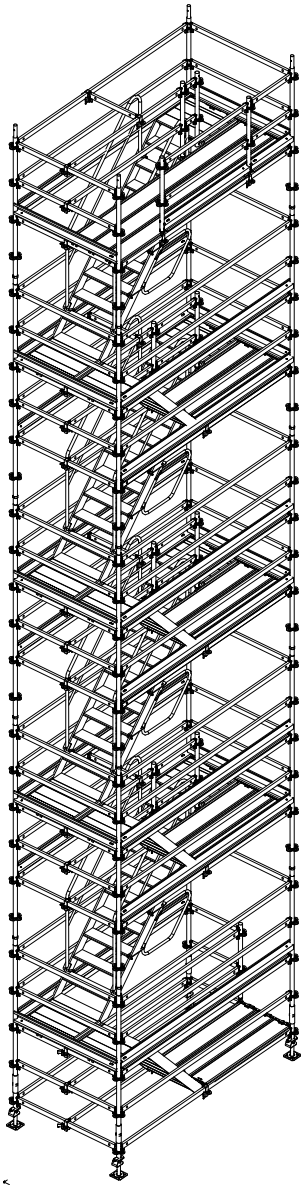

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	20	PC	0.06	1.18
100009	Standard UVR 200	8	PC	10.00	80.00
100012	Standard UVR 300	12	PC	14.70	176.40
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	11	PC	4.61	50.71
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	18	PC	2.73	49.14
114641	Ledger UH 150 Plus	48	PC	4.72	226.56
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	52	PC	8.68	451.36
124112	Steel Deck UDG 25 x 150	12	PC	9.41	112.92
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111103	Staircase UAS 75 x 150/100, Alu	4	PC	17.90	71.60
111124	Staircase UAS 75 x 300/200, Alu	4	PC	32.90	131.60
100742	Stair Guardrail UAG	8	PC	10.00	80.00
133543	Stair Guardrail UAH-2	4	PC	4.51	18.04
110793	Ledger to Ledger Coupler UHA Half	32	PC	1.09	34.88
109764	UH Spigot	4	PC	1.25	5.00
110792	Ledger to Ledger Coupler UHA Half w. Spigot	6	PC	1.90	11.40
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	10	PC	2.99	29.90
110211	Toeboard Steel UPY 300	15	PC	6.09	91.35
Total weight				kg	1,719.05

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3 x 1.5m A/t 12.3m high. (3m Lifts) Kit List		June 2022	26

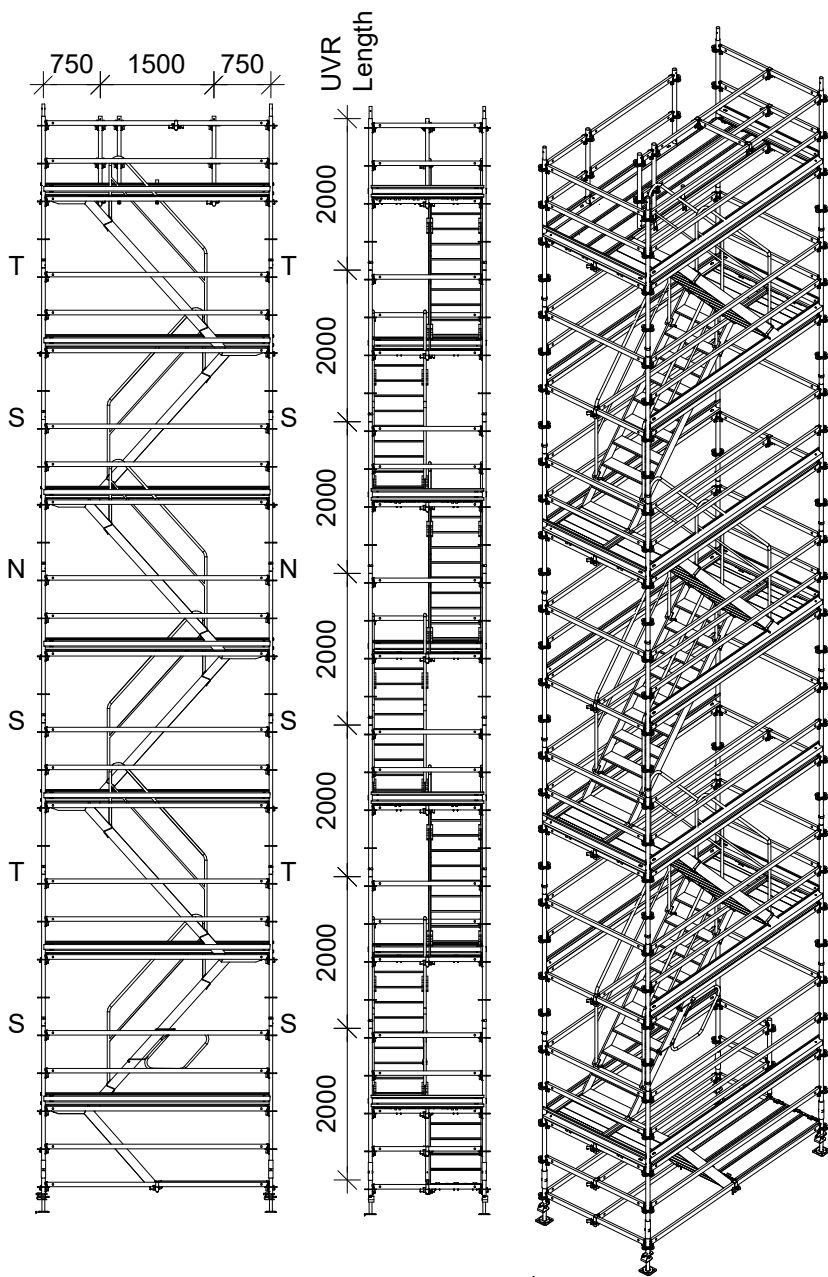

Maximum / Practical No Persons permitted on Stair Tower = 23



Calculated Leg Load = 12.6 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 2.0 kN
Max. Calc. Force A^L: 3.5 kN
Max. Calc. Tube Axial Force: 4.0 kN

Netted Scaffold (<0.6cf.l)*

Max. Calc. Force All : 3.3 kN
Max. Calc. Force A^L: 6.0 kN
Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 2.6 kN
Max. Calc. Force A^L: 4.7 kN
Max. Calc. Tube Axial Force: 5.3 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1560 kg



Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 13.3 m
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 13.3m high		June 2022	27

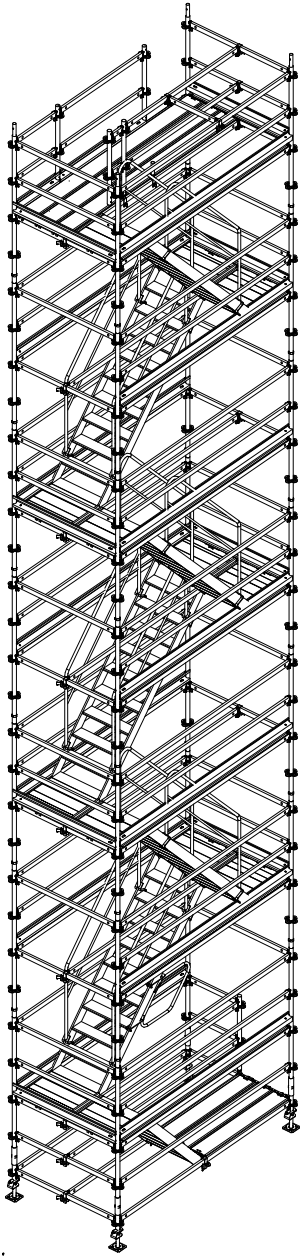

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	28	PC	0.06	1.65
100009	Standard UVR 200	28	PC	10.00	280.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114641	Ledger UH 150 Plus	40	PC	4.72	188.80
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	51	PC	8.68	442.68
124112	Steel Deck UDG 25 x 150	3	PC	9.41	28.23
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111124	Staircase UAS 75 x 300/200, Alu	6	PC	32.90	197.40
100742	Stair Guardrail UAG	12	PC	10.00	120.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	21	PC	1.09	22.89
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	9	PC	2.99	26.91
110211	Toeboard Steel UPY 300	13	PC	6.09	79.17
Total weight			kg		1,554.79

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 13.3m high. Kit List		June 2022	28

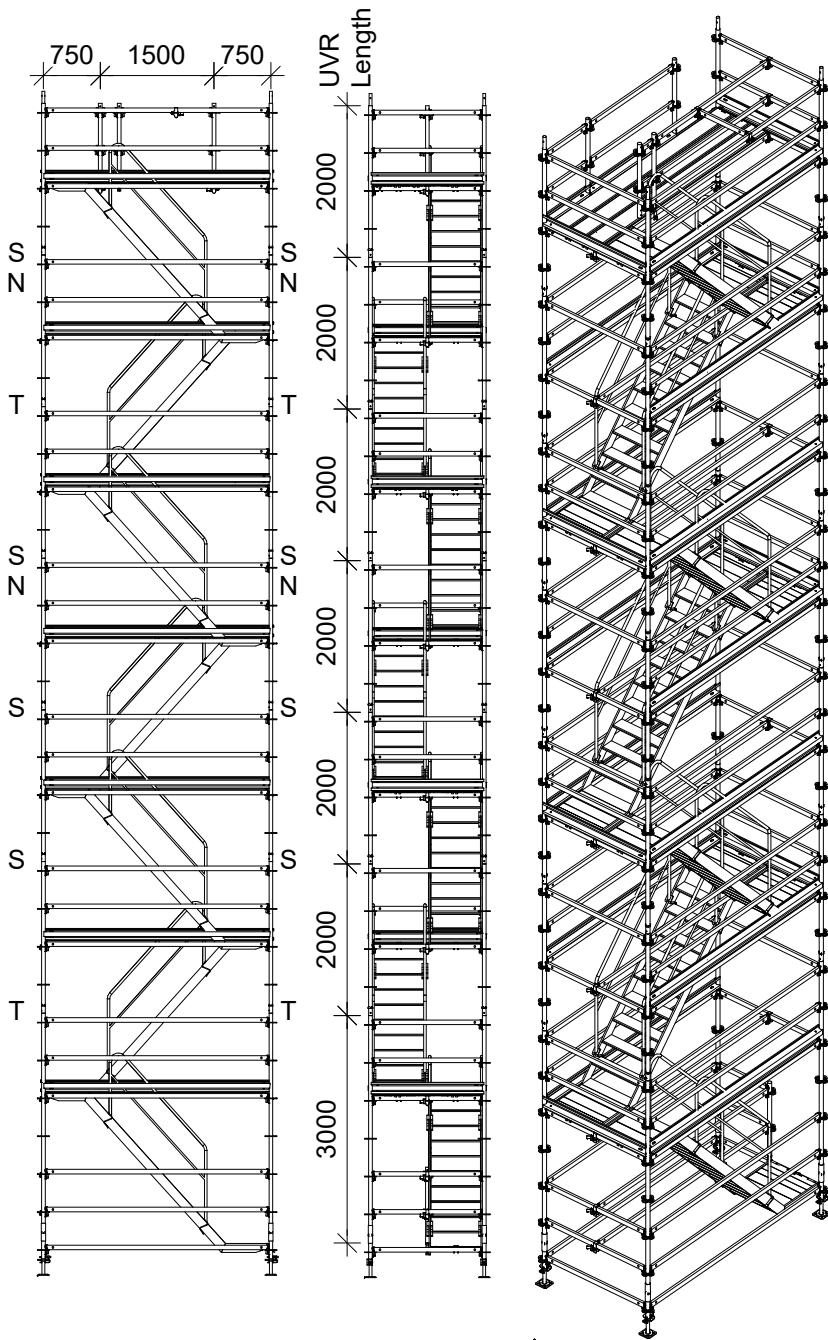

Maximum / Practical No Persons permitted on Stair Tower = 25



Calculated Leg Load = 13.5 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
 N = additional tying in for netted scaffold
 S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 2.6 kN
 Max. Calc. Force A[⊥]: 4.7 kN
 Max. Calc. Tube Axial Force: 5.3 kN

Netted Scaffold (<0.6cf_⊥)*

Max. Calc. Force All : 3.3 kN
 Max. Calc. Force A[⊥]: 6.0 kN
 Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
 Max. Calc. Force A[⊥]: 7.0 kN
 Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
 60% open structure = Anchor load x 0.75
 30% open structure = Anchor load x 0.50
 Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1610 kg



Stair tower Dim

Tower Length: 3.0 m
 Tower Depth: 1.5 m
 Tower Height (deck level): 14.3 m
 Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
 Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company			
Project			
Subject	PERI UP Flex Staircase 75	System Selected by	Date
	3.0m x 1.5m A/t 14.3m high		June 2022
			Sheet
			29

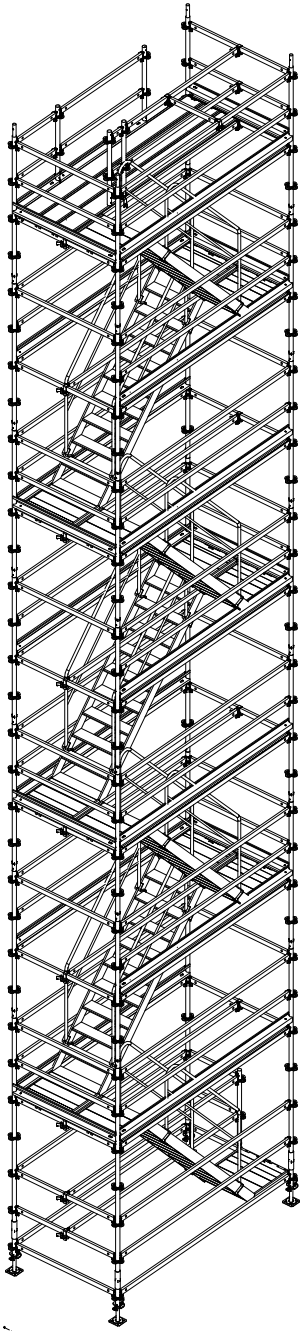

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	28	PC	0.06	1.65
100009	Standard UVR 200	24	PC	10.00	240.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114641	Ledger UH 150 Plus	42	PC	4.72	198.24
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	54	PC	8.68	468.72
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111124	Staircase UAS 75 x 300/200, Alu	7	PC	32.90	230.30
100742	Stair Guardrail UAG	14	PC	10.00	140.00
110793	Ledger to Ledger Coupler UHA Half	20	PC	1.09	21.80
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	9	PC	2.99	26.91
110211	Toeboard Steel UPY 300	13	PC	6.09	79.17
Total weight			kg		1,605.61

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 14.3m high. Kit List		June 2022	30

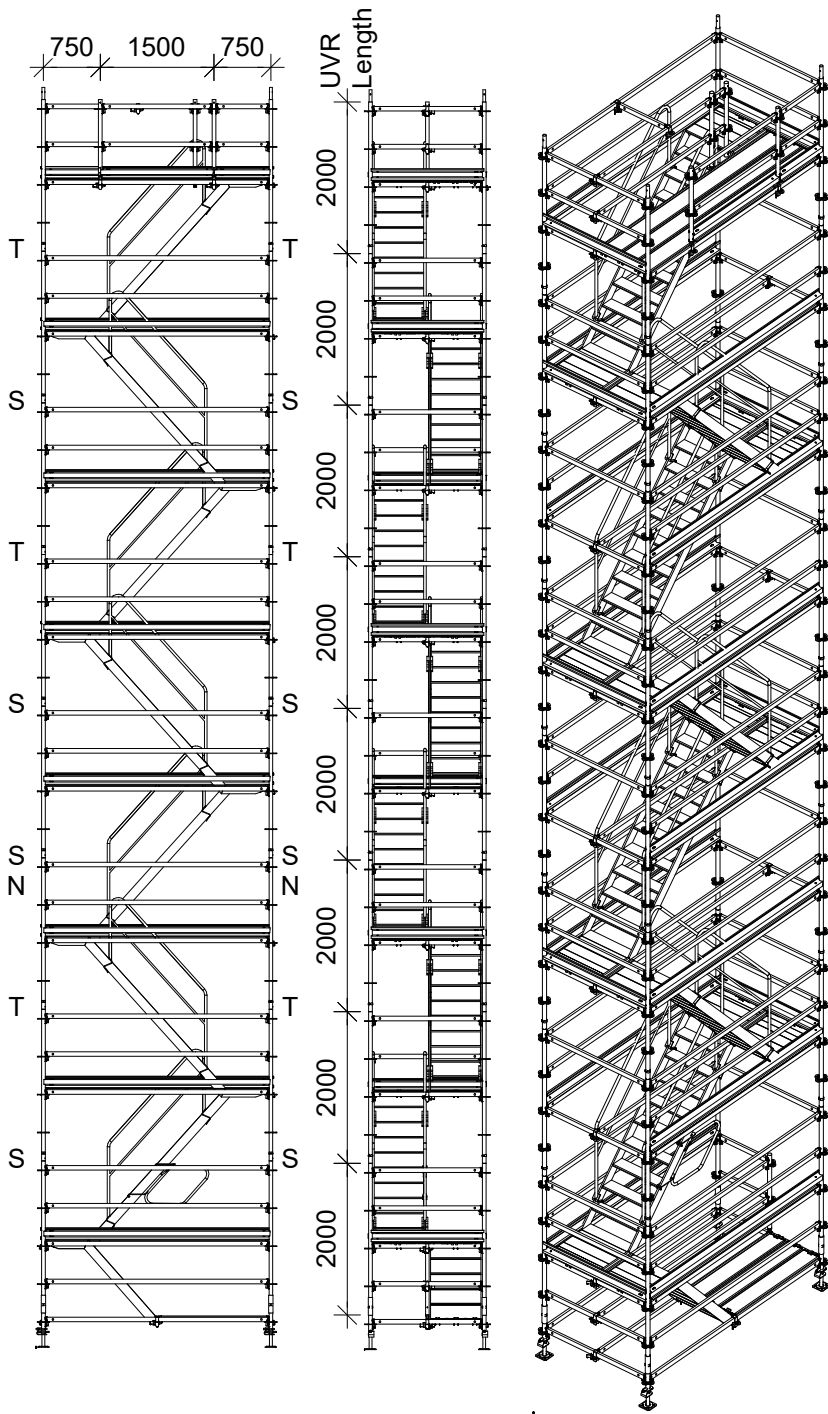

Maximum / Practical No Persons permitted on Stair Tower = 26



Calculated Leg Load= 14.0 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 2.0 kN
Max. Calc. Force A[⊥]: 3.5 kN
Max. Calc. Tube Axial Force: 4.0 kN

Netted Scaffold (<0.6cf_l)*

Max. Calc. Force All : 3.3 kN
Max. Calc. Force A[⊥]: 6.0 kN
Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A[⊥]: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1760 kg



Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 15.3 m
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 15.3m high		June 2022	31

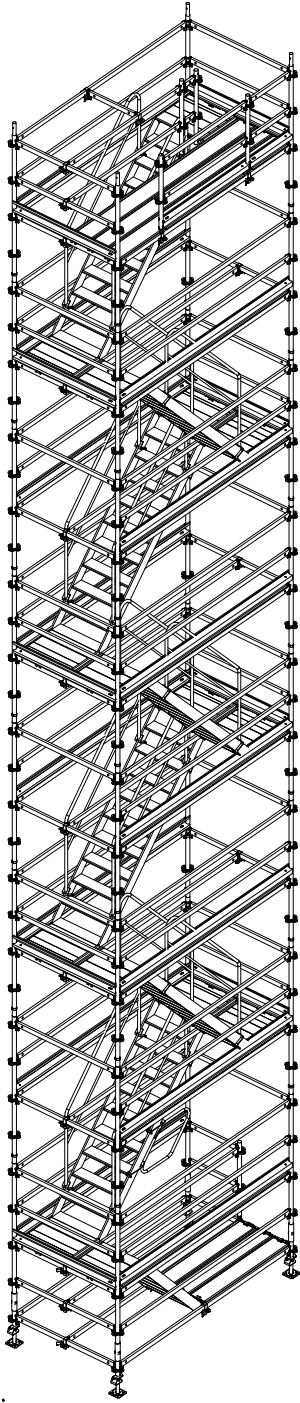

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	32	PC	0.06	1.89
100009	Standard UVR 200	32	PC	10.00	320.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114641	Ledger UH 150 Plus	45	PC	4.72	212.40
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	59	PC	8.68	512.12
124112	Steel Deck UDG 25 x 150	3	PC	9.41	28.23
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111124	Staircase UAS 75 x 300/200, Alu	7	PC	32.90	230.30
100742	Stair Guardrail UAG	14	PC	10.00	140.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	23	PC	1.09	25.07
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	10	PC	2.99	29.90
110211	Toeboard Steel UPY 300	15	PC	6.09	91.35
Total weight			kg		1,757.07

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 15.3m high. Kit List		June 2022	32

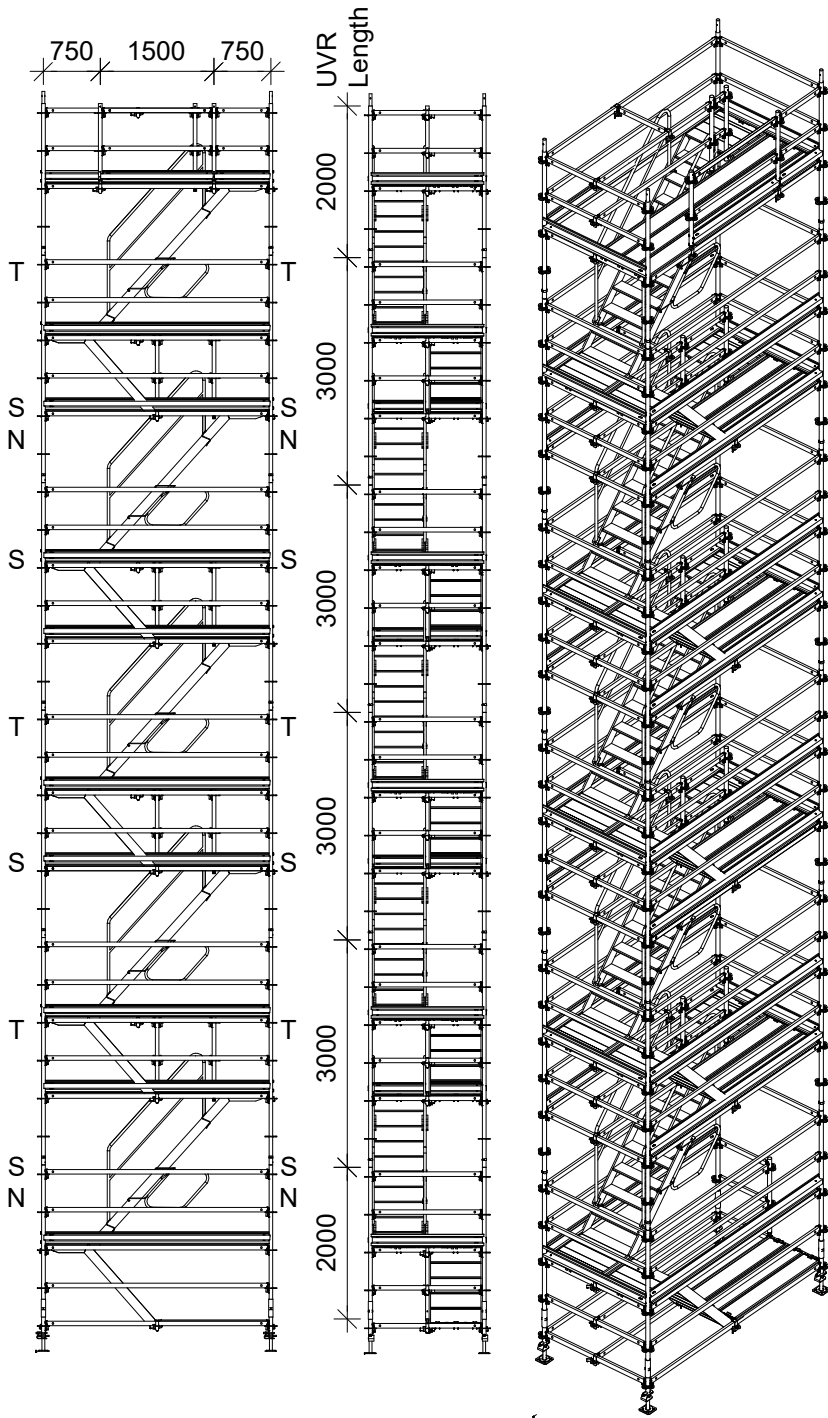

Maximum / Practical No Persons permitted on Stair Tower = 26



Calculated Leg Load = 15 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 1.7 kN
Max. Calc. Force A^L: 3.5 kN
Max. Calc. Tube Axial Force: 4.0 kN

Netted Scaffold (<0.6cf_L)*

Max. Calc. Force All : 3.3 kN
Max. Calc. Force A^L: 6.0 kN
Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A^L: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 2090 kg



Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 15.3 m
Lift Heights: 3.0 m



Scaffold placed Max 0.3m from the structure

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 15.3m high. (3m Lifts)		June 2022	33

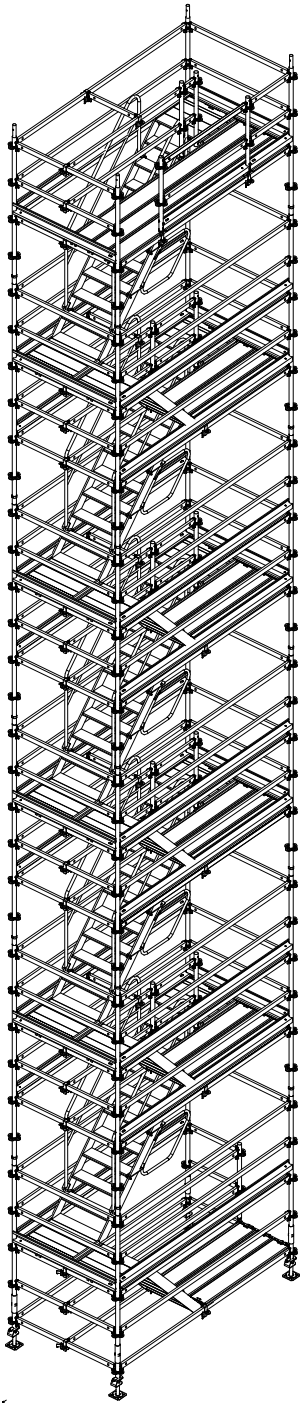

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	24	PC	0.06	1.42
100009	Standard UVR 200	8	PC	10.00	80.00
100012	Standard UVR 300	16	PC	14.70	235.20
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	13	PC	4.61	59.93
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	22	PC	2.73	60.06
114641	Ledger UH 150 Plus	60	PC	4.72	283.20
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	62	PC	8.68	538.16
124112	Steel Deck UDG 25 x 150	15	PC	9.41	141.15
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111103	Staircase UAS 75 x 150/100, Alu	5	PC	17.90	89.50
111124	Staircase UAS 75 x 300/200, Alu	5	PC	32.90	164.50
100742	Stair Guardrail UAG	10	PC	10.00	100.00
133543	Stair Guardrail UAH-2	5	PC	4.51	22.55
110793	Ledger to Ledger Coupler UHA Half	39	PC	1.09	42.51
109764	UH Spigot	5	PC	1.25	6.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	7	PC	1.90	13.30
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	12	PC	2.99	35.88
110211	Toeboard Steel UPY 300	19	PC	6.09	115.71
Total weight			kg		2,086.33

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3 x 1.5m A/t 15.3m high. (3m Lifts) Kit List		June 2022	34

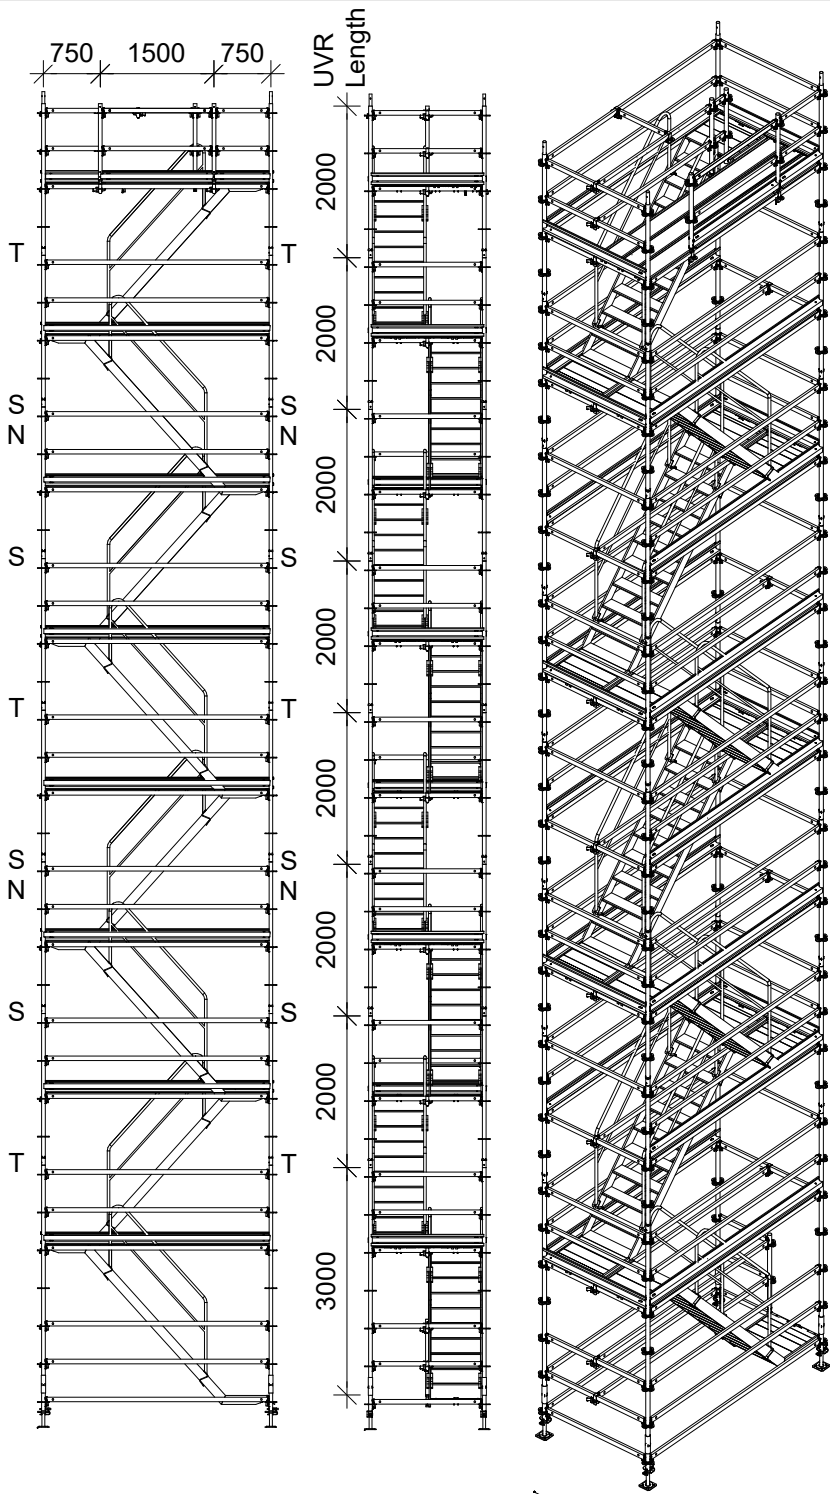

Maximum / Practical No Persons permitted on Stair Tower = 28



Calculated Leg Load= 15.0 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 2.0 kN
Max. Calc. Force A[⊥]: 3.5 kN
Max. Calc. Tube Axial Force: 4.0 kN

Netted Scaffold (<0.6cf⊥)*

Max. Calc. Force All : 3.3 kN
Max. Calc. Force A[⊥]: 6.0 kN
Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A[⊥]: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1810 kg



Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 16.3 m
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 16.3m high		June 2022	35

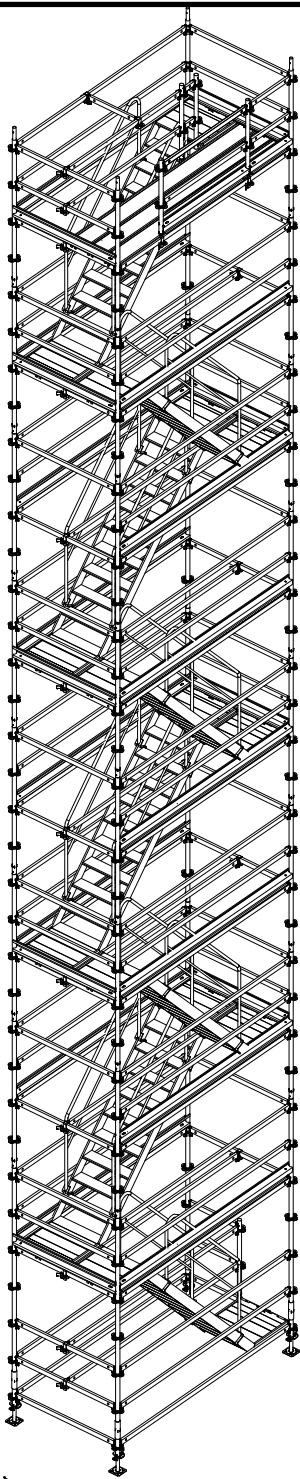

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	32	PC	0.06	1.89
100009	Standard UVR 200	28	PC	10.00	280.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114641	Ledger UH 150 Plus	48	PC	4.72	226.56
114645	Ledger UH 200 Plus	3	PC	6.04	18.12
114651	Ledger UH 300 Plus	61	PC	8.68	529.48
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111124	Staircase UAS 75 x 300/200, Alu	8	PC	32.90	263.20
100742	Stair Guardrail UAG	16	PC	10.00	160.00
110793	Ledger to Ledger Coupler UHA Half	22	PC	1.09	23.98
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	10	PC	2.99	29.90
110211	Toeboard Steel UPY 300	15	PC	6.09	91.35
Total weight				kg	1,811.22

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 16.3m high. Kit List		June 2022	36

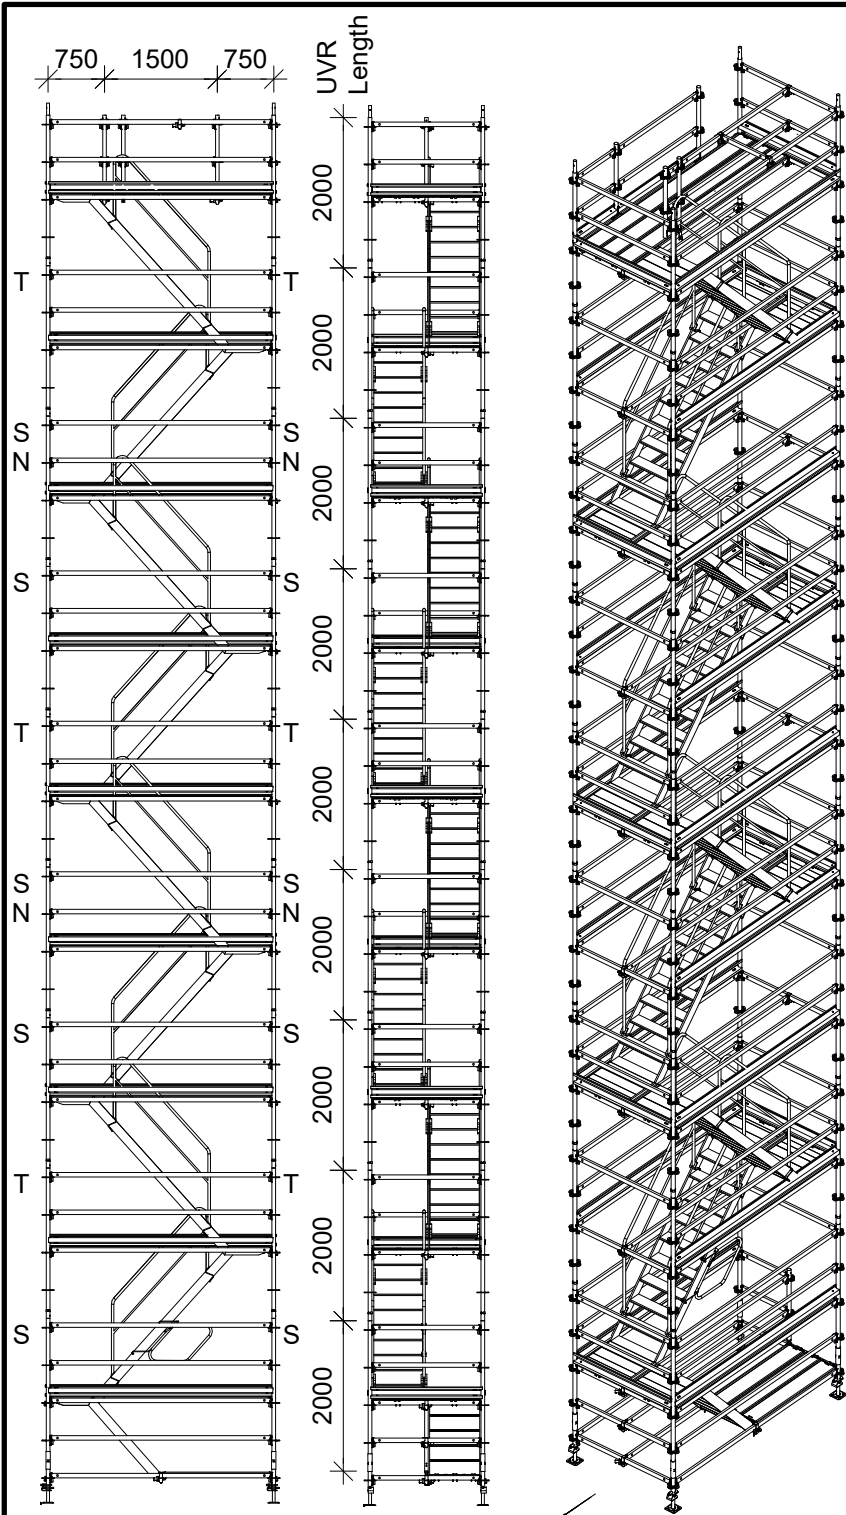

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



Maximum / Practical No Persons permitted on Stair Tower = 29



Calculated Leg Load= 15.5 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
 N = additional tying in for netted scaffold
 S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 2.6 kN
 Max. Calc. Force A[⊥]: 4.7 kN
 Max. Calc. Tube Axial Force: 5.3 kN

Netted Scaffold (<0.6cf1)*

Max. Calc. Force All : 3.3 kN
 Max. Calc. Force A[⊥]: 6.0 kN
 Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
 Max. Calc. Force A[⊥]: 7.0 kN
 Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
 60% open structure = Anchor load x 0.75
 30% open structure = Anchor load x 0.50
 Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 1960 kg



Stair tower Dim

Tower Length: 3.0 m
 Tower Depth: 1.5 m
 Tower Height (deck level): 17.3 m
 Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure



PERI Ltd.


Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 17.3m high		June 2022	37

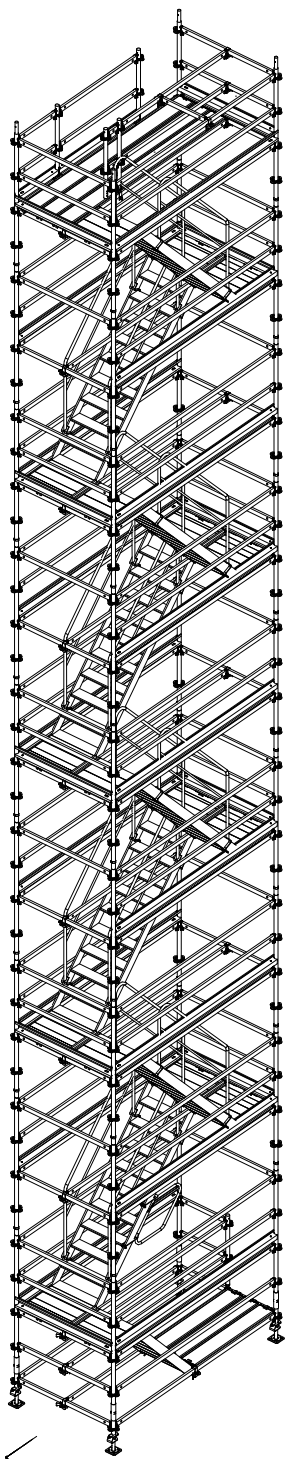

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	36	PC	0.06	2.12
100009	Standard UVR 200	36	PC	10.00	360.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114641	Ledger UH 150 Plus	50	PC	4.72	236.00
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	66	PC	8.68	572.88
124112	Steel Deck UDG 25 x 150	3	PC	9.41	28.23
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111124	Staircase UAS 75 x 300/200, Alu	8	PC	32.90	263.20
100742	Stair Guardrail UAG	16	PC	10.00	160.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	25	PC	1.09	27.25
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	11	PC	2.99	32.89
110211	Toeboard Steel UPY 300	17	PC	6.09	103.53
Total weight			kg		1,951.92

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 17.3m high. Kit List		June 2022	38

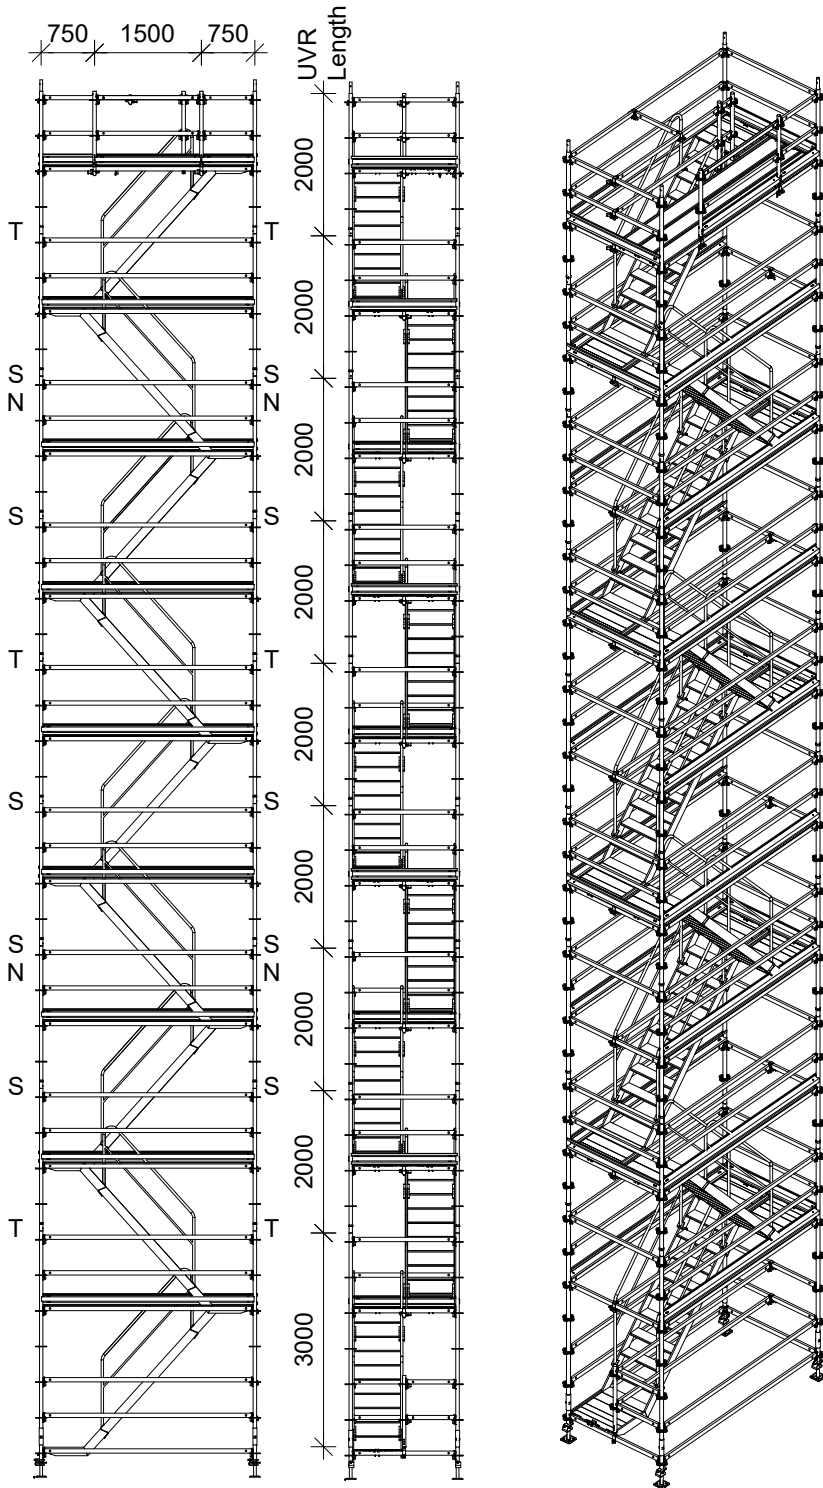

Maximum / Practical No Persons permitted on Stair Tower = 31



Calculated Leg Load = 16.5 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
 N = additional tying in for netted scaffold
 S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 2.6 kN
 Max. Calc. Force A[⊥]: 4.7 kN
 Max. Calc. Tube Axial Force: 5.3 kN

Netted Scaffold (<0.6cf₁)*

Max. Calc. Force All : 3.3 kN
 Max. Calc. Force A[⊥]: 6.0 kN
 Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
 Max. Calc. Force A[⊥]: 7.0 kN
 Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
 60% open structure = Anchor load x 0.75
 30% open structure = Anchor load x 0.50
 Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 2010 kg



Stair tower Dim

Tower Length: 3.0 m
 Tower Depth: 1.5 m
 Tower Height (deck level): 18.3 m
 Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
 Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 18.3m high		June 2022	39

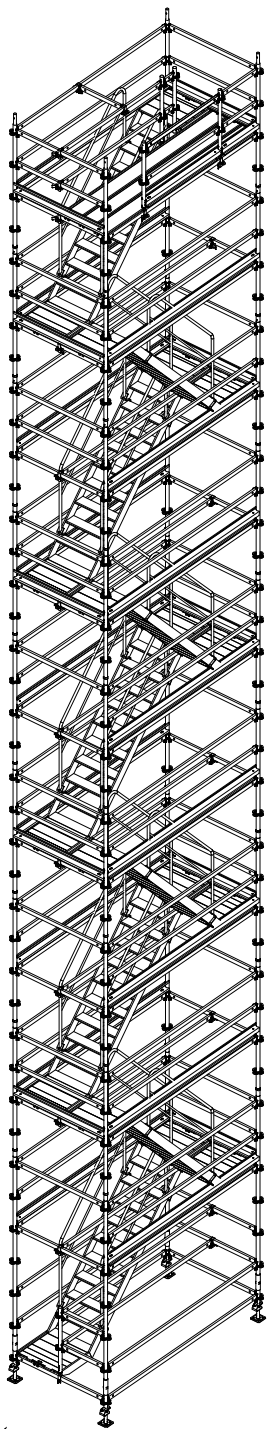

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	36	PC	0.06	2.12
100009	Standard UVR 200	32	PC	10.00	320.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114641	Ledger UH 150 Plus	53	PC	4.72	250.16
114645	Ledger UH 200 Plus	3	PC	6.04	18.12
114651	Ledger UH 300 Plus	68	PC	8.68	590.24
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111124	Staircase UAS 75 x 300/200, Alu	9	PC	32.90	296.10
100742	Stair Guardrail UAG	18	PC	10.00	180.00
110793	Ledger to Ledger Coupler UHA Half	24	PC	1.09	26.16
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	11	PC	2.99	32.89
110211	Toeboard Steel UPY 300	17	PC	6.09	103.53
Total weight			kg		2,006.07

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 18.3m high. Kit List		June 2022	40

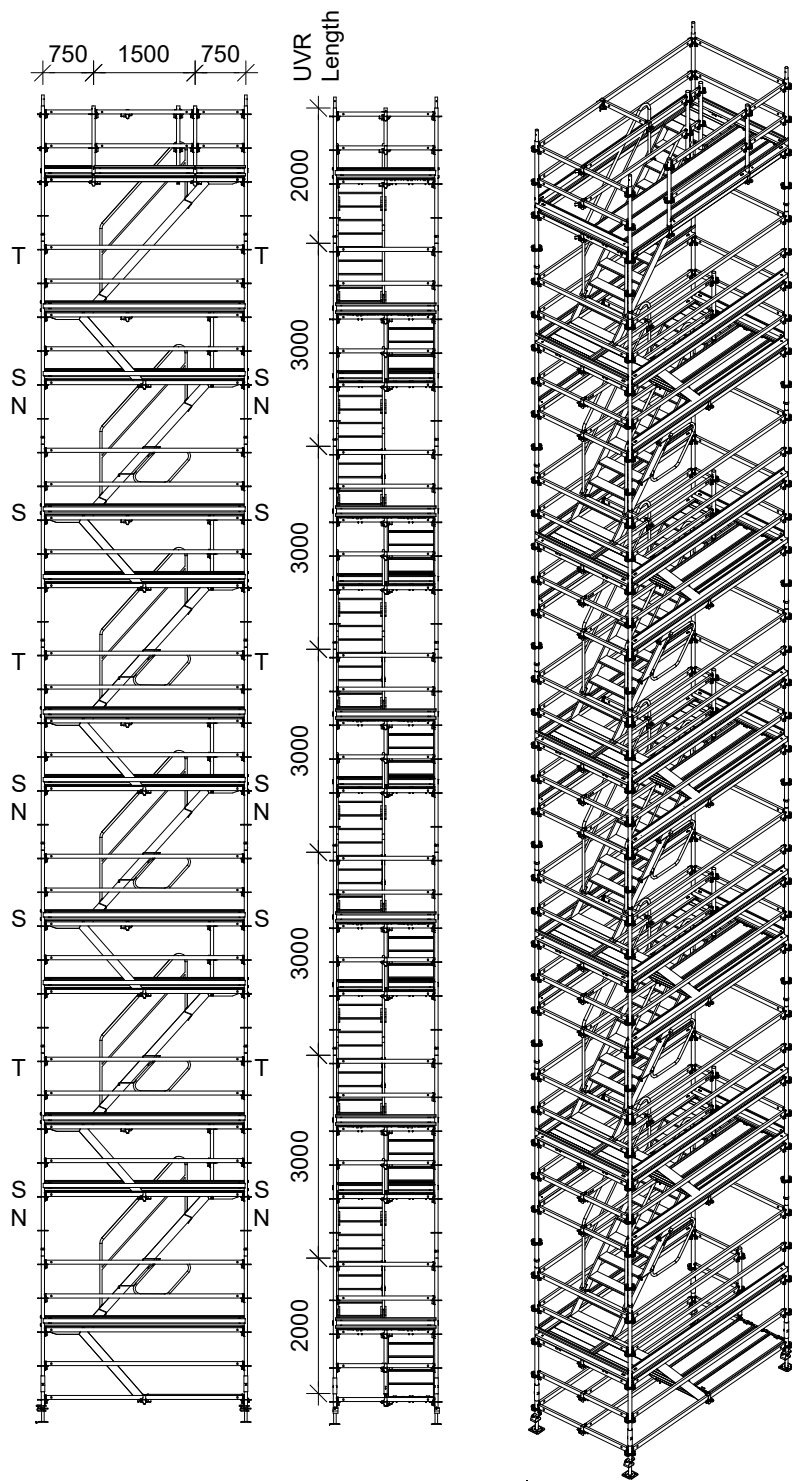

Maximum / Practical No Persons permitted on Stair Tower = 30



Calculated Leg Load= 17.5 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 1.7 kN
Max. Calc. Force A^L: 3.0 kN
Max. Calc. Tube Axial Force: 3.4 kN

Netted Scaffold (<0.6cfL)*

Max. Calc. Force All : 2.5 kN
Max. Calc. Force A^L: 4.5 kN
Max. Calc. Tube Axial Force: 5.1 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A^L: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 2420 kg



Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 18.3 m
Lift Heights: 3.0 m



Scaffold placed Max 0.3m from the structure

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company			
Project			
Subject	PERI UP Flex Staircase 75	System Selected by	Date
	3.0 x 1.5 m Alt 18.3m high. (3m Lifts)		June 2022
			Sheet 41

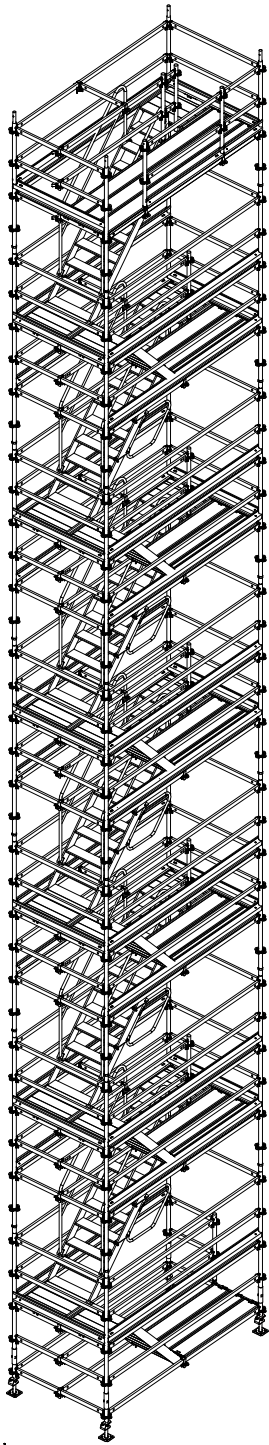

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	28	PC	0.06	1.65
100009	Standard UVR 200	8	PC	10.00	80.00
100012	Standard UVR 300	20	PC	14.70	294.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	10	PC	4.61	46.10
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	16	PC	2.73	43.68
114641	Ledger UH 150 Plus	60	PC	4.72	283.20
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114648	Ledger UH 250 Plus	10	PC	7.36	73.60
114651	Ledger UH 300 Plus	73	PC	8.68	633.64
124112	Steel Deck UDG 25 x 150	18	PC	9.41	169.38
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111103	Staircase UAS 75 x 150/100, Alu	6	PC	17.90	107.40
111124	Staircase UAS 75 x 300/200, Alu	6	PC	32.90	197.40
100742	Stair Guardrail UAG	12	PC	10.00	120.00
133543	Stair Guardrail UAH-2	5	PC	4.51	22.55
110793	Ledger to Ledger Coupler UHA Half	51	PC	1.09	55.59
109764	UH Spigot	6	PC	1.25	7.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	14	PC	2.99	41.86
110211	Toeboard Steel UPY 300	23	PC	6.09	140.07
Total weight				kg	2,420.34

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

Latest UK Edition



PERI Ltd.



Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0 x 1.5 m Alt 18.3m high. (3m Lifts) Kit List		June 2022	42

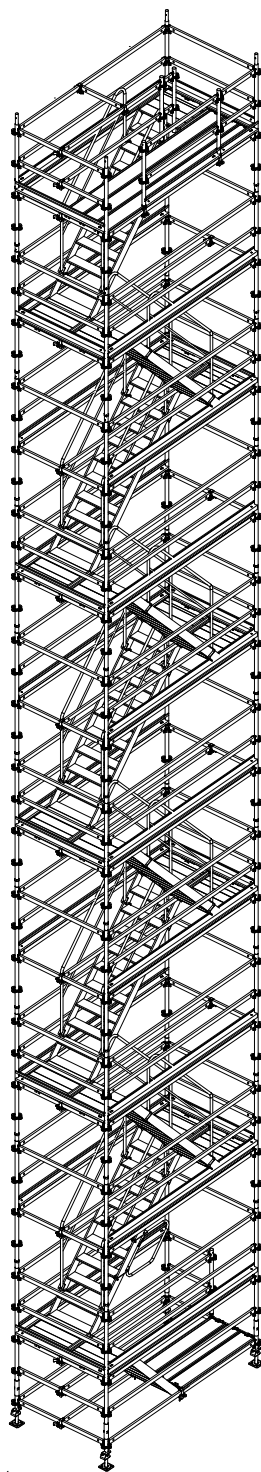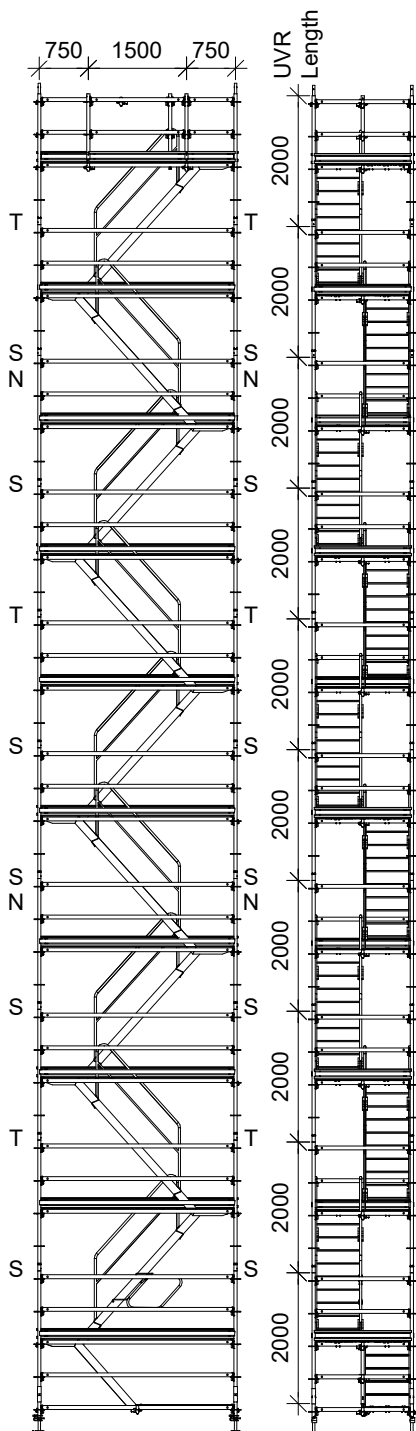

Maximum / Practical No Persons permitted on Stair Tower = 32



Calculated Leg Load = 17.0 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
N = additional tying in for netted scaffold
S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 2.6 kN
Max. Calc. Force A[⊥]: 4.7 kN
Max. Calc. Tube Axial Force: 5.3 kN

Netted Scaffold (<0.6cf⊥)*

Max. Calc. Force All : 3.3 kN
Max. Calc. Force A[⊥]: 6.0 kN
Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
Max. Calc. Force A[⊥]: 7.0 kN
Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
60% open structure = Anchor load x 0.75
30% open structure = Anchor load x 0.50
Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 2150 kg



Stair tower Dim

Tower Length: 3.0 m
Tower Depth: 1.5 m
Tower Height (deck level): 19.3 m
Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company			
Project			
Subject	PERI UP Flex Staircase 75	System Selected by	Date
	3 x 1.5 m Alt 19.3m high		June 2022
			Sheet 43

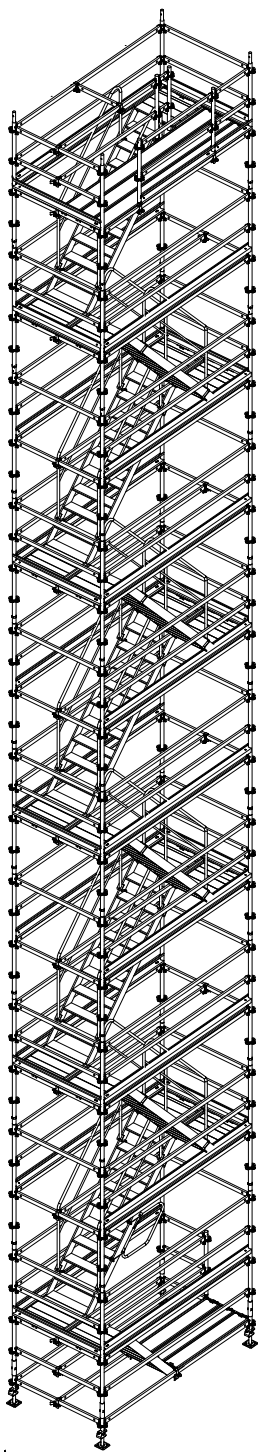

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	40	PC	0.06	2.36
100009	Standard UVR 200	40	PC	10.00	400.00
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	6	PC	2.73	16.38
114641	Ledger UH 150 Plus	55	PC	4.72	259.60
114645	Ledger UH 200 Plus	2	PC	6.04	12.08
114651	Ledger UH 300 Plus	73	PC	8.68	633.64
124112	Steel Deck UDG 25 x 150	3	PC	9.41	28.23
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111103	Staircase UAS 75 x 150/100, Alu	1	PC	17.90	17.90
111124	Staircase UAS 75 x 300/200, Alu	9	PC	32.90	296.10
100742	Stair Guardrail UAG	18	PC	10.00	180.00
133543	Stair Guardrail UAH-2	1	PC	4.51	4.51
110793	Ledger to Ledger Coupler UHA Half	27	PC	1.09	29.43
109764	UH Spigot	1	PC	1.25	1.25
110792	Ledger to Ledger Coupler UHA Half w. Spigot	3	PC	1.90	5.70
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	12	PC	2.99	35.88
110211	Toeboard Steel UPY 300	19	PC	6.09	115.71
Total weight			kg		2,146.77

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

Latest UK Edition



PERI Ltd.



Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3 x 1.5 m Alt 19.3m high. Kit List		June 2022	44

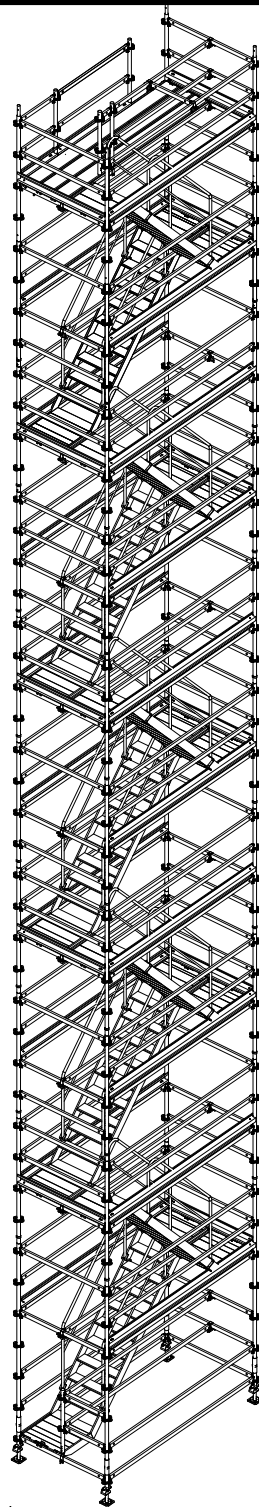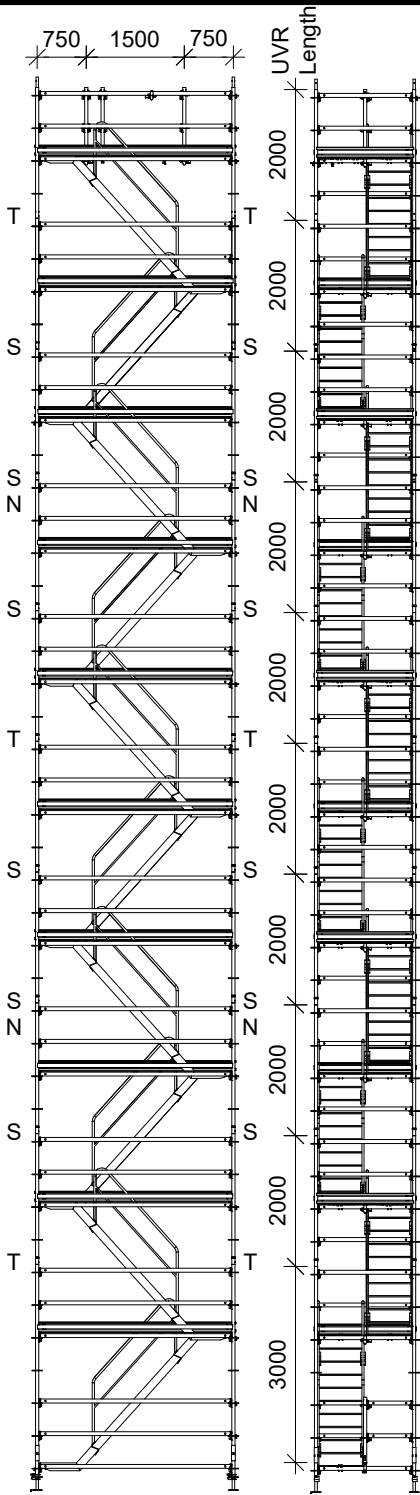

Maximum / Practical No Persons permitted on Stair Tower = 34



Calculated Leg Load = 18.5 kN



Dynamic Wind Pressure: 0.50 kN/m²



T = Tying in position
 N = additional tying in for netted scaffold
 S = additional tying in for sheeted scaffold

Max. Calculated Anchor loads:

Unclad Scaffold*

Max. Calc. Force All : 2.6 kN
 Max. Calc. Force A[⊥]: 4.7 kN
 Max. Calc. Tube Axial Force: 5.3 kN

Netted Scaffold (<0.6cf_l)*

Max. Calc. Force All : 3.3 kN
 Max. Calc. Force A[⊥]: 6.0 kN
 Max. Calc. Tube Axial Force: 6.8 kN

Sheeted Scaffold

Max. Calc. Force All : 3.9 kN
 Max. Calc. Force A[⊥]: 7.0 kN
 Max. Calc. Tube Axial Force: 8.0 kN

*Anchor loads based on tower tied to open structure (90% open). Forces may be reduced to suit structure permeability:
 60% open structure = Anchor load x 0.75
 30% open structure = Anchor load x 0.50
 Closed structure = Anchor load x 0.25

Refer to IFAU for anchoring Diagram



Maximum calculated Stair Tower PERI UP weight (unfactored) = 2320 kg



Stair tower Dim

Tower Length: 3.0 m
 Tower Depth: 1.5 m
 Tower Height (deck level): 20.3 m
 Lift Heights: 2.0 m



Scaffold placed Max 0.3m from the structure

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration
 Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company			
Project			
Subject	PERI UP Flex Staircase 75	System Selected by	Date
	3.0m x 1.5m A/t 20.3m high		June 2022
			Sheet
			45

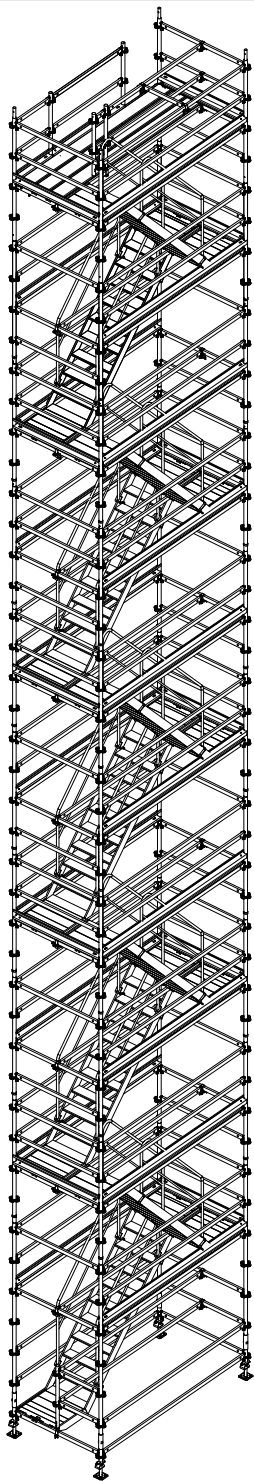

Art No	Article description	Qty	Unit	Weight	Σ Weight
100411	Adj. Base Plate UJB 38-50/30	4	PC	3.39	13.56
100863	Spindle Locking UJS	4	PC	1.02	4.08
111053	Locking Pin Ø 48/57	36	PC	0.06	2.12
100009	Standard UVR 200	40	PC	10.00	400.00
100012	Standard UVR 300	4	PC	14.70	58.80
100014	Base Standard UVB 24	4	PC	2.47	9.88
100000	Top Standard UVH 100	5	PC	4.61	23.05
114613	Ledger UH 25 Plus	2	PC	1.42	2.84
114629	Ledger UH 75 Plus	5	PC	2.73	13.65
114641	Ledger UH 150 Plus	68	PC	4.72	320.96
114645	Ledger UH 200 Plus	3	PC	6.04	18.12
114651	Ledger UH 300 Plus	75	PC	8.68	651.00
124915	Steel Deck UDG 25 x 300	3	PC	17.70	53.10
111124	Staircase UAS 75 x 300/200, Alu	11	PC	32.90	361.90
100742	Stair Guardrail UAG	20	PC	10.00	200.00
110793	Ledger to Ledger Coupler UHA Half	25	PC	1.09	27.25
109764	UH Spigot	2	PC	1.25	2.50
110792	Ledger to Ledger Coupler UHA Half w. Spigot	2	PC	1.90	3.80
110514	Toeboard Steel UPY 75	1	PC	1.45	1.45
110160	Toeboard Steel UPY 150	12	PC	2.99	35.88
110211	Toeboard Steel UPY 300	19	PC	6.09	115.71
Total weight			kg		2,319.69

Bins and Pallets are not included in the material list.

PERI UP Flex Stairs 75

Instruction for Assembly and Use - Standard Configuration

Latest UK Edition



PERI Ltd.


Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent


PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	3.0m x 1.5m A/t 20.3m high. Kit List		June 2022	46

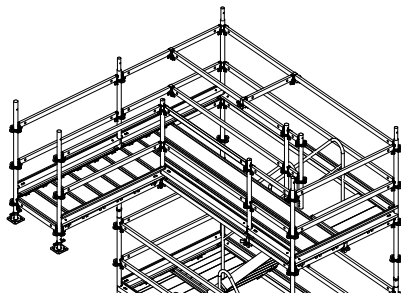


Flat Run-off at the top

If assembled, consider:
 + 89 kg Self Weight
 +1.57 kN extra Led Load

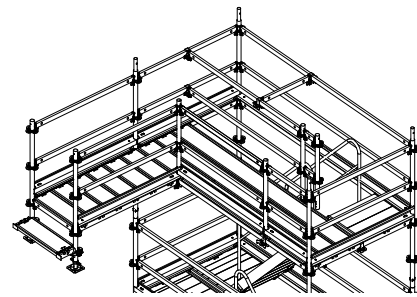


-0.25m Run-off at the top

If assembled, consider:
 + 101 kg Self Weight
 +1.82 kN Leg Load

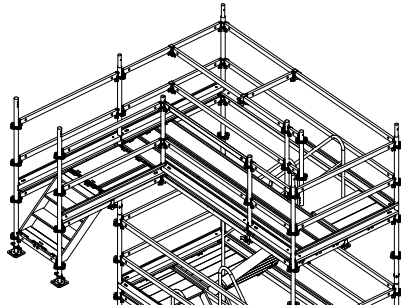


-0.50m Run-off at the top

If assembled, consider:
 + 94 kg Self Weight
 +1.75 kN Leg Load

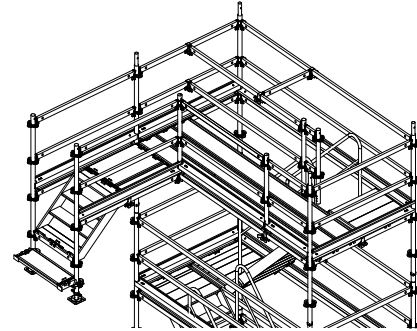

-0.75m Run-off at the top

If assembled, consider:
 + 105 kg Self Weight
 +1.92 kN Led Load

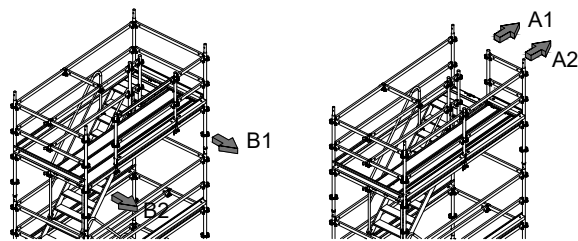


Possible Run-off Configurations

Anchor Bolt Fixing
 (PERI Anchor Bolt14/20 x 130
 or by Client)

Brace Connector HDR-2

Scaffold Tube connected
 to vertical Standard



Note!

The client is responsible for ensuring proper transmission of all stated reactions into the supporting structure. Reactions are based on permissible stress design and are unfactored.

Scaffold Anchor Detail

(Use With Base Plate-2 For RSS)



PERI Ltd.


Clifton Upon Dunsmore
 Rugby
 Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent


PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	Run-off Configurations. Details		June 2022	47

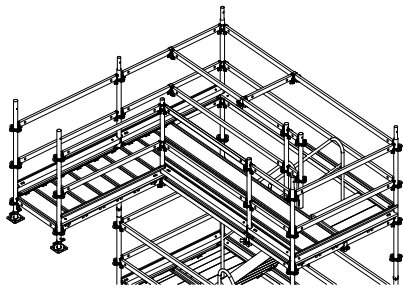


Flat Run-off at the top

FLAT RUN-OFF						
Art No	Article description	Qty	Unit	Weight	Σ Weight	
100411	Adj. Base Plate UJB 38-50/30	2	PC	3.39	6.78	
100003	Top Standard UVH 150	2	PC	6.92	13.84	
114629	Ledger UH 75 Plus	1	PC	2.73	2.73	
114641	Ledger UH 150 Plus	6	PC	4.72	28.32	
124121	Steel Deck UDG 25 x 75	6	PC	5.26	31.56	
110160	Toeboard Steel UPY 150	2	PC	2.99	5.98	
Total weight			kg		89.21	

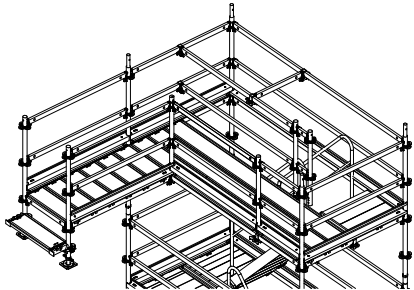


-0.25m Run-off at the top

-0.25m RUN-OFF						
Art No	Article description	Qty	Unit	Weight	Σ Weight	
100411	Adj. Base Plate UJB 38-50/30	2	PC	3.39	6.78	
116306	Rosett Coupler UEV 180°	2	PC	1.70	3.40	
100003	Top Standard UVH 150	2	PC	6.92	13.84	
114629	Ledger UH 75 Plus	1	PC	2.73	2.73	
114641	Ledger UH 150 Plus	6	PC	4.72	28.32	
124121	Steel Deck UDG 25 x 75	7	PC	5.26	36.82	
110160	Toeboard Steel UPY 150	2	PC	2.99	5.98	
115959	Support UC 25	2	PC	1.16	2.32	
Total weight			kg		100.19	

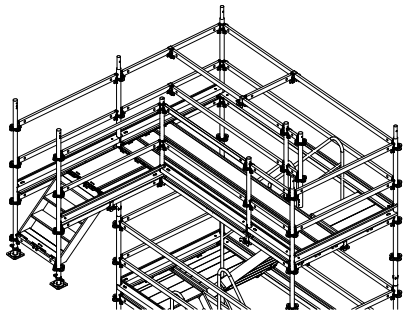

-0.50m Run-off at the top

-0.50m RUN-OFF						
Art No	Article description	Qty	Unit	Weight	Σ Weight	
100411	Adj. Base Plate UJB 38-50/30	2	PC	3.39	6.78	
100005	Top Standard UVH 200	2	PC	9.24	18.48	
114629	Ledger UH 75 Plus	2	PC	2.73	5.46	
114641	Ledger UH 150 Plus	6	PC	4.72	28.32	
124121	Steel Deck UDG 25 x 75	3	PC	5.26	15.78	
113228	Staircase UAS 75 x 75/50, Alu	1	PC	10.10	10.10	
110793	Ledger to Ledger Coupler UHA Half	2	PC	1.09	2.18	
110160	Toeboard Steel UPY 150	2	PC	2.99	5.98	
Total weight			kg		93.08	

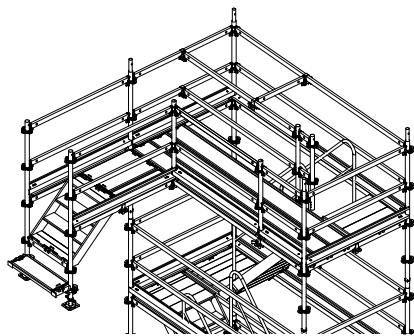

-0.75m Run-off at the top

-0.75m RUN-OFF						
Art No	Article description	Qty	Unit	Weight	Σ Weight	
100411	Adj. Base Plate UJB 38-50/30	2	PC	3.39	6.78	
116306	Rosett Coupler UEV 180°	2	PC	1.70	3.40	
100005	Top Standard UVH 200	2	PC	9.24	18.48	
114629	Ledger UH 75 Plus	2	PC	2.73	5.46	
114641	Ledger UH 150 Plus	6	PC	4.72	28.32	
124121	Steel Deck UDG 25 x 75	4	PC	5.26	21.04	
113228	Staircase UAS 75 x 75/50, Alu	1	PC	10.10	10.10	
110793	Ledger to Ledger Coupler UHA Half	2	PC	1.09	2.18	
110160	Toeboard Steel UPY 150	2	PC	2.99	5.98	
115959	Support UC 25	2	PC	1.16	2.32	
Total weight			kg		104.06	



PERI Ltd.

Clifton Upon Dunsmore
Rugby
Warwickshire CV23 0AN

Phone: 01788861600

Copyright of this drawing and associated documents are property of PERI. They may not be reproduced or made available to third persons, especially competitors without our consent

PERI UP STAIR TOWERS COMPLIANCE SHEET

Company				
Project				
Subject	PERI UP Flex Staircase 75	System Selected by	Date	Sheet
	RUN-OFFS. MATERIAL LIST		June 2022	48